

PRICE BOOK

2024





**DIVISIONS
& FACILITIES**
United States

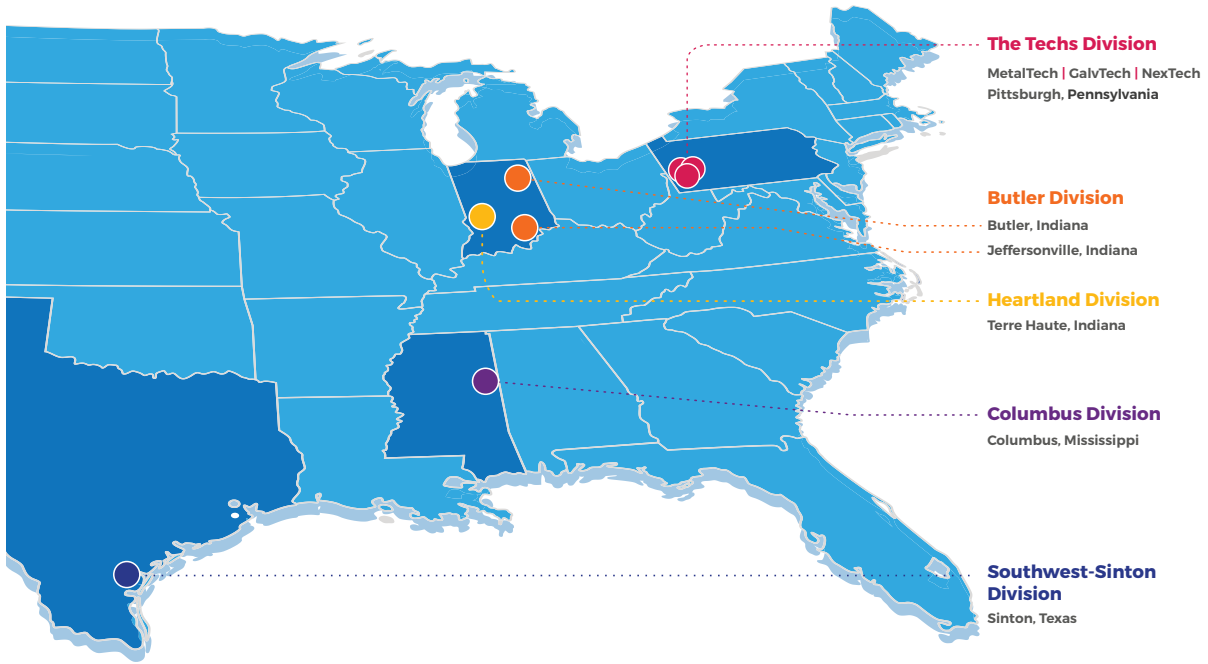


TABLE OF CONTENTS

BUTLER DIVISION

BUTLER, INDIANA

| | |
|-----------------------------------|---|
| Hot-Rolled Bands..... | 2 |
| Cold-Rolled Sheet..... | 4 |
| Galvanized Hot-Rolled Sheet..... | 6 |
| Galvanized Cold-Rolled Sheet..... | 8 |

JEFFERSONVILLE, INDIANA

| | |
|-----------------------------------|----|
| Galvanized Cold-Rolled Sheet..... | 10 |
| Galvalume® Sheet..... | 11 |

COLUMBUS DIVISION

COLUMBUS, MISSISSIPPI

| | |
|-----------------------------------|----|
| Hot-Rolled Bands..... | 13 |
| Cold-Rolled Sheet..... | 15 |
| Galvanized Hot-Rolled Sheet..... | 17 |
| Galvanized Cold-Rolled Sheet..... | 18 |
| Galvalume® Sheet..... | 20 |
| Aluminized Type 1 Sheet..... | 21 |
| Aluminized Type 2 Sheet..... | 22 |

HEARTLAND DIVISION

TERRE HAUTE, INDIANA

| | |
|-----------------------------------|----|
| Hot-Rolled Pickled..... | 24 |
| Cold-Rolled Sheet..... | 25 |
| Galvanized Cold-Rolled Sheet..... | 26 |

TABLE OF CONTENTS

SOUTHWEST-SINTON DIVISION

SINTON, TEXAS

| | |
|-----------------------------------|----|
| Hot-Rolled Bands..... | 28 |
| Plate..... | 30 |
| Cold-Rolled Sheet..... | 32 |
| Galvanized Hot-Rolled Sheet..... | 34 |
| Galvanized Cold-Rolled Sheet..... | 35 |
| Galvalume® Sheet..... | 37 |

THE TECHS DIVISION

PITTSBURGH, PENNSYLVANIA

GalvTech

| | |
|-----------------------------------|----|
| Galvanized Cold-Rolled Sheet..... | 39 |
| Galfan® Cold-Rolled Sheet..... | 41 |

MetalTech

| | |
|-----------------------------------|----|
| Galvanized Hot-Rolled Sheet..... | 42 |
| Galvanized Cold-Rolled Sheet..... | 43 |
| Galfan® Hot-Rolled Sheet..... | 44 |
| Galfan® Cold-Rolled Sheet..... | 45 |

NexTech


| | |
|-----------------------------------|----|
| Galvanized Cold-Rolled Sheet..... | 46 |
|-----------------------------------|----|

METALLIC COATING EXTRAS

| | |
|---|----|
| Standard, Metric, & Galvalume® Metallic Coating Extras..... | 48 |
| Galfan® Metallic & Aluminized Coating Extras..... | 49 |

BUTLER DIVISION

Butler, Indiana
Jeffersonville, Indiana

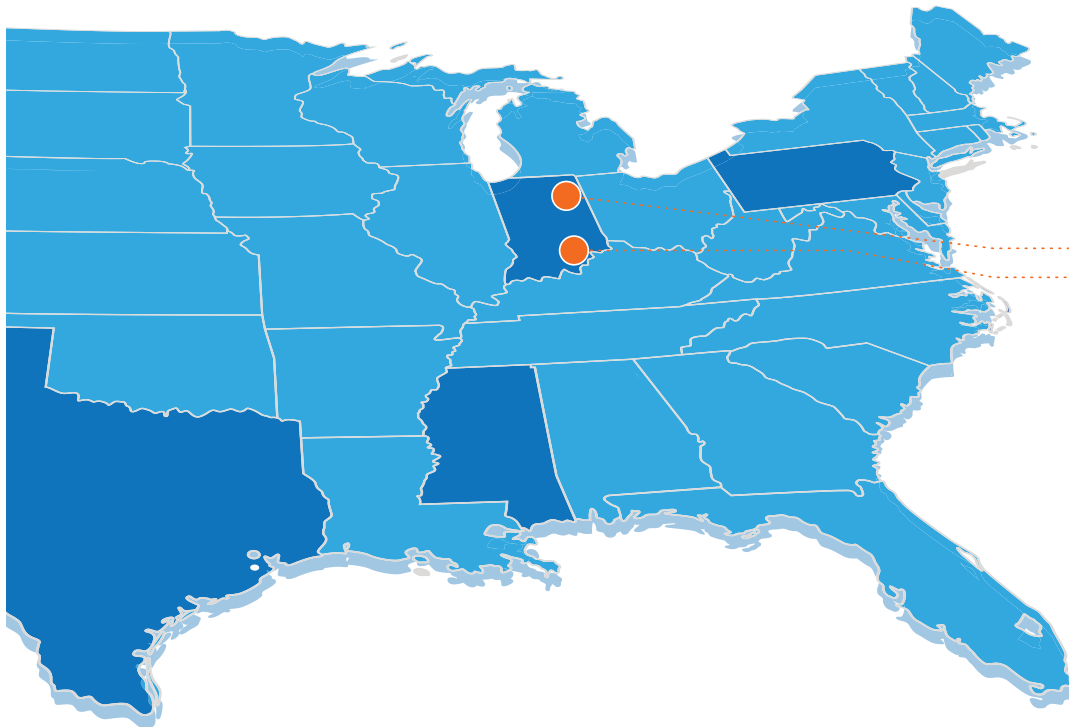

Butler Division
Butler, Indiana
Jeffersonville, Indiana

Butler, Indiana
4500 County Road 59
Butler, Indiana 46721
(800) 799-8942

Jeffersonville, Indiana
5134 Loop Road
Jeffersonville, Indiana 47130
(812) 218-1490

HOT-ROLLED BANDS

Steel Dynamics base hot-rolled steel sheet is an unprocessed band directly off the hot-strip mill and has not been side-trimmed or cropped back to gauge. As rolled, hot bands may be susceptible to coil breaks. Additional processing such as temper passing, pickling, edge trimming and tension leveling are available on site or via a qualified external processor. SDI hot-rolled bands are produced on a 30" ID. All processed hot-rolled steel sheet will be provided on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|-------|-------------------|-------|-----------|-----------|----------|
| Under | Thru | Under | Thru | 36"- <42" | 42"- <48" | 48"- 62" |
| 0.388 | 0.084 | 0.375 | 0.081 | \$4.00 | \$2.00 | Base |
| 0.084 | 0.069 | 0.081 | 0.066 | \$4.50 | \$2.50 | \$0.50 |
| 0.069 | 0.058 | 0.066 | 0.055 | \$6.50 | \$4.50 | \$2.50 |
| 0.058 | 0.042 | 0.055 | 0.039 | \$7.00 | \$5.00 | \$3.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A1011 & ASTM A1018

Hot-rolled carbon steel sheet

Mild Steels

| | |
|---------------------------------|--------|
| Commercial Steel Type B | Base |
| Drawing Steel Type B (Boron) | \$0.50 |
| Drawing Steel Type B (Titanium) | \$0.75 |

Structural Steels

| | |
|---|--------|
| SS Grade 30 | \$0.50 |
| SS Grade 33 | \$0.50 |
| SS Grade 36 Type 1 | \$0.50 |
| SS Grade 36 Type 2 | \$1.00 |
| SS Grade 40 | \$0.50 |
| SS Grade 45 | \$0.50 |
| SS Grade 50 | \$1.25 |
| SS Grade 55 | \$1.50 |
| SS Grade 57 Modified for racking and purlin | \$1.75 |

| High-Strength Low-Alloy Steels | Class 1 | Class 2 |
|--------------------------------|---------|---------|
| HSLAS Grade 45 | \$2.25 | \$1.75 |
| HSLAS Grade 50 | \$2.75 | \$2.25 |
| HSLAS Grade 55 | \$3.25 | \$2.75 |
| HSLAS Grade 60 | \$4.25 | \$3.75 |
| HSLAS Grade 65 | \$4.75 | \$4.25 |
| HSLAS Grade 70 | \$5.50 | \$5.00 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|------------------|--------|
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 60 | \$4.00 |
| HSLAS-F Grade 70 | \$5.25 |
| HSLAS-F Grade 80 | \$6.50 |

Ultra-High-Strength Steels

| | |
|-----------------------|---------|
| UHSS Grade 90 Type 1 | \$8.00 |
| UHSS Grade 100 Type 1 | Inquire |

ASTM A36

Hot-rolled carbon steel sheet used for general structural purposes. Coils are excluded from qualification to ASTM A36 until they are cut-to-length and processed into a finished structural product.

| | |
|----------------------------|--------|
| For Conversion to ASTM A36 | \$0.50 |
|----------------------------|--------|

ASTM A414

Hot-rolled high-strength, low-alloy carbon steel sheet for pressure vessels. Coils are excluded from qualification to ASTM A414 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil.

| | |
|-------------------------------------|--------|
| For Conversion to ASTM A414 Grade C | \$1.50 |
| For Conversion to ASTM A414 Grade G | \$1.50 |

ASTM A572

Hot-rolled high-strength, low-alloy columbium-vanadium carbon steel intended for riveted, bolted, or welded structures. Coils are excluded from qualification to ASTM A572 until they are cut-to-length and processed into a finished structural product.

| | |
|---|---------|
| For Conversion to ASTM A572 Grade 50 Type 1 | Inquire |
|---|---------|

ASTM A606

Hot-rolled, high-strength, low-alloy carbon steel sheet with improved atmospheric corrosion resistance.

| | |
|--------|---------|
| Type 4 | \$10.50 |
|--------|---------|

Widths other than 48", 60" may be subject to accumulation.

ASTM A786

Hot-rolled carbon steel floor plate, Pattern No. 4.

| | |
|--|--------|
| ASTM A1011/A1018 Commercial Steel Type B | \$3.00 |
| For Conversion to ASTM A36 | \$3.50 |

Widths other than 48", 60" may be subject to accumulation.

ADDITIONAL MATERIAL SPECIFICATIONS SUITABLE FOR CONVERSION TO CERTAIN ASTM PLATE SPECIFICATIONS AND CERTAIN ASTM AND PIPE AND TUBE SPECIFICATIONS MAY BE AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

HOT-ROLLED BANDS

SAE J403

Hot-rolled carbon steel

| | Base |
|------|--------|
| 1006 | Base |
| 1008 | Base |
| 1015 | \$0.50 |
| 1017 | \$0.50 |
| 1018 | \$0.75 |
| 1020 | \$0.75 |
| 1021 | \$0.75 |
| 1022 | \$0.75 |
| 1026 | \$1.75 |
| 1030 | \$1.75 |
| 1035 | \$2.25 |
| 1050 | \$2.75 |

Additional boron-intensified steels (xxBxx) available on an inquiry-by-inquiry basis.

SAE J404

Hot-rolled carbon-alloy steel sheet

| | |
|------|---------|
| 4130 | Inquire |
|------|---------|

JAPANESE INDUSTRIAL STANDARD (JIS) G3131

Hot-rolled carbon steel sheet for general forming

| | |
|------|--------|
| SPHC | \$0.25 |
| SPHD | \$0.75 |

JAPANESE INDUSTRIAL STANDARD (JIS) G3113

Hot-rolled carbon steel sheet for automotive structural applications

| | |
|----------|---------|
| SAPH 310 | \$1.25 |
| SAPH 370 | \$1.75 |
| SAPH 400 | \$3.25 |
| SAPH 440 | \$3.75 |
| SAPH 540 | Inquire |
| SAPH 590 | Inquire |

SAE J1392

Hot-rolled, high-strength, low-alloy carbon steel sheet

| | XLF | YLF | ZLF |
|-----|---------|--------|---------|
| 035 | \$0.75 | N/A | N/A |
| 040 | Inquire | N/A | N/A |
| 045 | \$1.75 | \$2.25 | Inquire |
| 050 | \$2.25 | \$2.75 | \$3.25 |
| 060 | \$3.75 | \$4.25 | Inquire |
| 070 | \$5.00 | \$5.50 | N/A |
| 080 | \$6.50 | \$7.00 | N/A |

SAE J2340

Hot-rolled, high-strength, low-alloy carbon steel sheet

| | SF | XF | YF |
|-----|---------|--------|---------|
| 300 | \$2.75 | \$2.25 | Inquire |
| 340 | Inquire | \$2.75 | Inquire |
| 380 | N/A | \$3.25 | Inquire |
| 420 | N/A | \$4.25 | Inquire |
| 490 | N/A | \$5.50 | N/A |
| 550 | N/A | \$7.00 | N/A |

JAPANESE INDUSTRIAL STANDARD (JIS) G3134

Hot-rolled, high-strength carbon steel sheet with improved formability for automotive applications

| | |
|----------|--------|
| SPFH 540 | \$7.00 |
| SPFH 590 | \$8.00 |

STANDARD PROCESSING EXTRAS

PICKLING

| | MILL EDGE | CUT EDGE |
|---------------------------|-----------|----------|
| From .375 min – .250 min | \$2.50 | \$3.00 |
| Under .250 min – .066 min | \$2.00 | \$2.50 |
| Under .066 min – .039 min | \$2.25 | \$2.75 |

TEMPER PASS

| | |
|---------------------------|--------|
| Under .170 min – .066 min | \$2.50 |
| Under .066 min – .042 min | \$2.00 |

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|---------------------|--------|
| 700 PIW to 1150 PIW | Base |
| Under 700 PIW | \$1.00 |

SHAPE ENHANCEMENT

| | MILL EDGE | CUT EDGE |
|---------------------------|-----------|----------|
| From .375 min – .165 min | Inquire | Inquire |
| Under .165 min – .066 min | \$1.00 | \$1.50 |
| Under .066 min – .040 min | \$1.50 | \$2.00 |

OTHER

| | |
|----------------------------|---------|
| Hot-Rolled Pickle Annealed | Inquire |
|----------------------------|---------|

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item. Please note that certain grade, thickness, and width combinations may require a minimum order quantity of up to 450 tons to avoid accumulation.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

COLD-ROLLED SHEET

Steel Dynamics base cold-rolled steel sheet has been cold-reduced to the specified thickness and subsequently annealed and temper-rolled to achieve the specified characteristics. Alternately, customers may specify a full-hard cold-rolled sheet with off-gauge heads and tails cropped at the temper mill. SDI cold-rolled sheet is produced on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 61" |
| 0.1020 | 0.0295 | 0.1000 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A109

Cold-rolled carbon steel strip

| | |
|-----------------------------|--------|
| No. 1 Temper (Full Hard) | Base |
| No. 2 Temper (Half Hard) | \$1.50 |
| No. 3 Temper (Quarter Hard) | \$0.75 |
| No. 4 Temper (Skin Rolled) | \$0.50 |

ASTM A1008

Cold-rolled carbon steel sheet

Mild Steels

| | |
|-------------------------|--------|
| Commercial Steel Type B | Base |
| Drawing Steel Types B | \$0.50 |

Structural Steels

| | |
|--------------------|--------|
| SS Grade 25 | \$0.50 |
| SS Grade 30 | \$0.50 |
| SS Grade 33 Type 1 | \$0.50 |
| SS Grade 40 Type 1 | \$0.75 |
| SS Grade 45 | \$0.75 |
| SS Grade 80 | \$0.50 |

High-Strength Low-Alloy Steels

| | Class 1 | Class 2 |
|----------------|---------|---------|
| HSLAS Grade 45 | \$2.75 | \$1.75 |
| HSLAS Grade 50 | \$3.25 | \$2.75 |
| HSLAS Grade 55 | \$3.75 | \$3.25 |
| HSLAS Grade 60 | Inquire | \$4.00 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|------------------|--------|
| HSLAS-F Grade 50 | \$3.25 |
| HSLAS-F Grade 60 | \$4.50 |

ASTM A606

Cold-rolled, high-strength, low-alloy carbon steel sheet with improved atmospheric corrosion resistance

| | |
|-----------------|---------|
| Type 4 Modified | Inquire |
|-----------------|---------|

Widths other than 48" and 60" may be subject to accumulation.

SAE J403

Cold-rolled carbon steel sheet

| | |
|------|---------|
| 1006 | Base |
| 1008 | Base |
| 1015 | \$0.50 |
| 1017 | \$0.50 |
| 1018 | \$0.75 |
| 1020 | \$0.75 |
| 1021 | \$0.75 |
| 1022 | \$0.75 |
| 1050 | Inquire |
| 1055 | Inquire |

SAE J1392

Cold-rolled, high-strength, low-alloy carbon steel sheet

| | XLF | YLF | ZLF |
|-----|--------|--------|--------|
| 035 | \$1.50 | N/A | N/A |
| 040 | \$1.50 | N/A | N/A |
| 045 | \$1.75 | \$4.00 | \$4.50 |
| 050 | \$2.75 | \$4.50 | N/A |

SAE J2340

Cold-rolled, high-strength, low-alloy carbon steel sheet

| | SF | XF | YF |
|-----|-----|--------|--------|
| 300 | N/A | \$3.00 | N/A |
| 340 | N/A | \$3.50 | \$4.50 |
| 380 | N/A | \$4.00 | N/A |
| 420 | N/A | \$4.50 | N/A |

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

COLD-ROLLED SHEET

JAPANESE INDUSTRIAL STANDARD (JIS) G3141

Cold-rolled carbon steel sheet for general forming

| | |
|----------|--------|
| SPCC 270 | \$0.75 |
|----------|--------|

JAPANESE INDUSTRIAL STANDARD (JIS) G3135

Cold-rolled carbon steel sheet for automotive structural applications

| | |
|----------|--------|
| SPFC 340 | \$1.25 |
| SPFC 370 | \$2.25 |
| SPFC 390 | \$3.25 |
| SPFC 440 | \$3.75 |

STANDARD PROCESSING EXTRAS

OTHER

| | |
|-----------|----------|
| Mill Edge | (\$0.50) |
|-----------|----------|

Only available on .030 minimum or heavier. May not be available on all grades. Please refer to our product capabilities for more information.

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 60,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED HOT-ROLLED SHEET

Steel Dynamics base hot-rolled, hot-dipped galvanized or galvanized product is a cost-effective solution for heavy-gauge, unexposed applications where mild surface defects such as coil breaks are not objectionable. Temper rolling may be specified to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized and galvanized steel sheet is spangle-free and is provided on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-------------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 61.5" |
| 0.1650 | 0.0690 | 0.1600 | 0.0660 | \$3.00 | \$1.50 | Base |
| 0.0690 | 0.0550 | 0.0660 | 0.0520 | \$3.25 | \$1.75 | Base |
| 0.0550 | 0.0460 | 0.0520 | 0.0420 | \$3.50 | \$2.00 | Base |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|---|---------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Forming Steel Type A | \$0.50 |
| Structural Steels | |
| SS Grade 33 | \$0.50 |
| SS Grade 37 | \$0.50 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.00 |
| SS Grade 50 – Class 2 | \$0.75 |
| SS Grade 50 – Class 3 | \$1.00 |
| SS Grade 50 – Class 4 | \$0.75 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 – Modified for racking and purlin | \$1.75 |
| High-Strength Low-Alloy Steels | |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 2 | \$3.25 |
| HSLAS Grade 60 | \$3.75 |
| HSLAS Grade 70 | \$5.00 |
| HSLAS Grade 80 | \$6.50 |
| HSLAS Grade 100 | Inquire |
| ASTM A1003 | |
| Hot-dipped galvanized carbon steel sheet for cold-forming framing members | |
| NS Grade 33 | \$0.50 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.00 |
| ST Grade 33H | \$0.50 |
| ST Grade 37H | \$0.50 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.00 |

| SAE J1392 | |
|--|--------|
| Hot-dipped galvanized, high-strength, low-alloy carbon steel sheet | |
| 040 XLF | \$1.50 |
| 050 XLF | \$2.25 |
| 060 XLF | \$3.75 |
| 070 XLF | \$5.00 |
| 080 XLF | \$6.50 |

| SAE J2340 | |
|---|--------|
| Hot-dipped galvanized dent resistant, high-strength, and ultra high-strength carbon sheet steel | |
| 340 XF | \$2.75 |
| 380 XF | \$3.25 |
| 420 XF | \$4.25 |
| 490 XF | \$5.50 |
| 550 XF | \$7.00 |

| SAE J403 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1015 | \$0.50 |
| 1017 | \$0.50 |
| 1018 | \$0.75 |
| 1020 | \$0.75 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED HOT-ROLLED SHEET

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|---------------|--------|
| Spangle-Free | Base |
| Temper-Rolled | \$0.50 |

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Clear Acrylic | \$1.50 |

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|--------------------|---------|
| 20,000# to 60,000# | Base |
| Less than 20,000# | Inquire |

OTHER

| | |
|--------------------|----------|
| Galvanneal | \$1.00 |
| U.L. Certification | \$0.25 |
| Mill Edge | (\$0.50) |

Mill edge required on coating weights greater than G-100.

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped galvanized or galvanized product is suitable for a broad range of applications. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized and galvanized steel sheet is spangle-free and is provided on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-------------|
| Under | Thru | Under | Thru | 36" - <42" | 42" - <48" | 48" - 61.5" |
| 0.0735 | 0.0295 | 0.0710 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Forming Steel Type A | \$0.50 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 80 – Class 1 | \$0.50 |
| Post Annealed | |
| Drawing Steel Modified | \$2.00 |
| SS Grade 33 | \$2.00 |

| ASTM A1003 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet for cold-forming framing members | |
| NS Grade 33 | \$0.25 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.75 |
| ST Grade 33H | \$0.25 |
| ST Grade 37H | \$0.25 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.75 |

| SAE J1392 | |
|--|--------|
| Hot-dipped galvanized, high-strength, low-alloy carbon steel sheet | |
| 040XLF | \$1.50 |

| SAE J403 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1015 | \$0.25 |
| 1017 | \$0.25 |
| 1018 | \$0.50 |
| 1020 | \$0.75 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

STANDARD PROCESSING EXTRAS

| SURFACE FINISH | |
|----------------|--------|
| Spangle-Free | Base |
| Extra Smooth | \$0.50 |

| SURFACE TREATMENT | |
|-----------------------|------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |

| OTHER | |
|--------------------|----------|
| Galvanneal | \$1.00 |
| U.L. Certification | \$0.25 |
| Mill Edge | (\$0.50) |

Mill edge required on coating weights greater than G-100, and only available on certain grades ordered as .030 minimum and heavier. Please refer to our product capabilities for more information.

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 60,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped galvanized product is suitable for a broad range of applications. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is spangle-free and is provided on a 20" or 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-------------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 61.5" |
| 0.0470 | 0.0295 | 0.0455 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Forming Steel Type A | \$0.50 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 80 – Class 1 | \$0.50 |

STANDARD PROCESSING EXTRAS

| SURFACE FINISH | |
|---------------------------------------|----------|
| Spangle-Free | Base |
| Extra Smooth | \$0.50 |
| SURFACE TREATMENT | |
| Rust-Preventative Oil | Base |
| Standard Passivation (RoHS-Compliant) | Base |
| Clear Acrylic | \$1.50 |
| RoHS-Compliant Acrylic | \$2.00 |
| OTHER | |
| U.L. Certification | \$0.25 |
| Mill Edge | (\$0.50) |

Mill edge required on coating weights greater than G-100, and only available on certain grades ordered as .030 minimum and heavier. Please refer to our product capabilities for more information.

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

| MAXIMUM COIL WEIGHT | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |

| MINIMUM LINE ITEM QUANTITY | |
|----------------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVALUME® SHEET

Steel Dynamics GALVALUME® product offers excellent corrosion protection in many applications through the combination of the sacrificial protection of conventional zinc coatings with the excellent barrier protection of aluminum. This product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI GALVALUME® is produced with a regular spangle and is provided on either a 20" or 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-------------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 61.5" |
| 0.0470 | 0.0295 | 0.0455 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A792 | |
|--|--------|
| Hot-dipped 55% aluminum-zinc alloy-coated carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Forming Steel Type A | \$0.50 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 80 – Class 1 | \$0.50 |

STANDARD PROCESSING EXTRAS

| SURFACE FINISH | |
|-----------------|----------|
| Regular Spangle | Base |
| Extra Smooth | \$0.50 |
| OTHER | |
| Mill Edge | (\$0.50) |

Available only on .030 minimum and heavier. May not be available on all grades. Please refer to our product capabilities for more information.

| SURFACE TREATMENT | |
|---------------------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation (RoHS-Complaint) | Base |
| Clear Acrylic | \$1.50 |
| RoHS-Compliant Acrylic | \$2.00 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

| MAXIMUM COIL WEIGHT | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |


| MINIMUM LINE ITEM QUANTITY | |
|----------------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.



**COLUMBUS
DIVISION**
Columbus, Mississippi

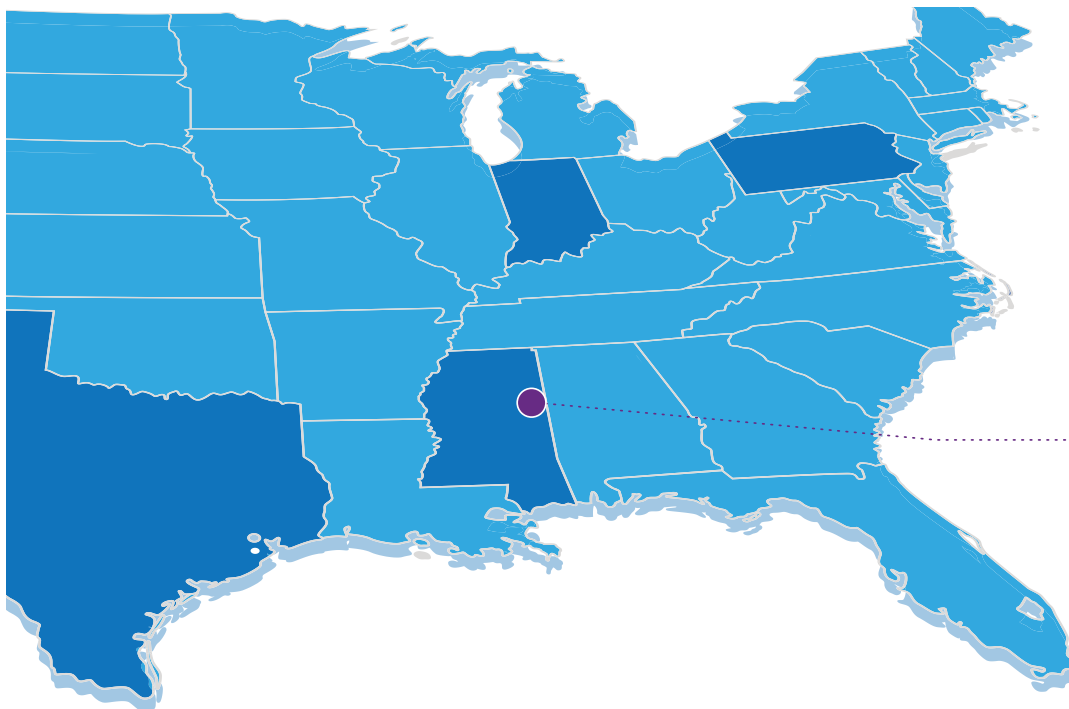

Columbus Division
Columbus, Mississippi

Columbus Division
1945 Airport Road
Columbus, MS 39703
(866) 369-3047

HOT-ROLLED BANDS

Steel Dynamics base hot-rolled steel sheet is an unprocessed band directly off the hot-strip mill and has not been side-trimmed or cropped back to gauge. As rolled, hot bands may be susceptible to coil breaks. Additional processing such as temper passing, pickling, edge trimming and tension leveling are available on site or via a qualified external processor. SDI hot-rolled bands are produced on a 30" ID. All processed hot-rolled steel sheet will be provided on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | | |
|-------------------|-------|-------------------|-------|-----------|-----------|----------|-----------|
| Under | Thru | Under | Thru | 36"– <42" | 42"– <48" | 48"– 72" | >72"– 76" |
| 0.756 | 0.084 | 0.750 | 0.081 | \$4.00 | \$2.00 | Base | \$0.50 |
| 0.084 | 0.069 | 0.081 | 0.066 | \$4.50 | \$2.50 | \$0.50 | \$1.50 |
| 0.069 | 0.058 | 0.066 | 0.055 | \$6.50 | \$4.50 | \$2.50 | — |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A1011 & ASTM A1018 | | |
|---|----------------|----------------|
| Hot-rolled carbon steel sheet | | |
| Mild Steels | | |
| Commercial Steel Types A & B | | Base |
| Drawing Steel Types A & B | | \$0.50 |
| Structural Steels | | |
| SS Grade 30 | | \$0.50 |
| SS Grade 33 | | \$0.50 |
| SS Grade 36 Type 1 | | \$0.50 |
| SS Grade 36 Type 2 | | \$1.00 |
| SS Grade 40 | | \$0.50 |
| SS Grade 45 | | \$0.50 |
| SS Grade 50 | | \$1.25 |
| SS Grade 55 | | \$1.50 |
| SS Grade 57 Modified for racking and purlin | | \$1.75 |
| High-Strength Low-Alloy Steels | | |
| | Class 1 | Class 2 |
| HSLAS Grade 45 | \$2.25 | \$1.75 |
| HSLAS Grade 50 | \$2.75 | \$2.25 |
| HSLAS Grade 55 | \$3.25 | \$2.75 |
| HSLAS Grade 60 | \$4.25 | \$3.75 |
| HSLAS Grade 65 | \$4.75 | \$4.25 |
| HSLAS Grade 70 | \$5.50 | \$5.00 |
| High-Strength Low-Alloy Steels with Improved Formability | | |
| HSLAS-F Grade 50 | | \$2.50 |
| HSLAS-F Grade 60 | | \$4.00 |
| HSLAS-F Grade 70 | | \$5.25 |
| HSLAS-F Grade 80 | | \$6.50 |
| Ultra-High-Strength Steels | | |
| UHSS Grade 90 Type 1 | | \$8.00 |
| UHSS Grade 100 Type 1 | | Inquire |

| ASTM A36 | | |
|--|--|--------|
| Hot-rolled carbon steel sheet used for general structural purposes. Coils are excluded from qualification to ASTM A36 until they are cut-to-length and processed into a finished structural product. | | |
| For Conversion to ASTM A36 | | \$0.50 |

COPPER SPECIFIED (> .20%) \$1.50

| ASTM A283 | |
|---|--------|
| Low and intermediate tensile strength carbon steel of structural quality for general application. Coils are excluded from qualification to ASTM A283 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil. | |
| For Conversion to ASTM A283 Grade C | \$0.50 |

| ASTM A285 | |
|--|--------|
| Low and intermediate tensile strength carbon steel for pressure vessels. Coils are excluded from qualification to ASTM A285 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil. | |
| For Conversion to ASTM A285 Grade C | \$0.50 |

| ASTM A414 | |
|--|--------|
| Hot-rolled high-strength, low-alloy carbon steel sheet for pressure vessels. Coils are excluded from qualification to ASTM A414 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil. | |
| For Conversion to ASTM A414 Grade C | \$1.50 |
| For Conversion to ASTM A414 Grade G | \$1.50 |

| ASTM A455 | |
|---|--------|
| High tensile strength hot-rolled carbon-manganese steel for pressure vessels. Coils are excluded from qualification to ASTM A455 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil. | |
| For Conversion to ASTM A455 Grade G | \$1.75 |

| ASTM A516 | |
|--|--------|
| Hot-rolled carbon steel intended for service in pressure vessels for moderate- to lower-temperature service. Coils are excluded from qualification to ASTM A516 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil. | |
| For Conversion to ASTM A516 Grade 70 | \$1.50 |

| ASTM A572 | |
|---|--------|
| Hot-rolled high-strength, low-alloy columbium-vanadium carbon steel intended for riveted, bolted, or welded structures. Coils are excluded from qualification to ASTM A572 until they are cut-to-length and processed into a finished structural product. | |
| For Conversion to ASTM A572 Grade 50 | \$2.25 |
| For Conversion to ASTM A572 Grade 55 | \$2.75 |
| For Conversion to ASTM A572 Grade 60 | \$3.75 |
| For Conversion to ASTM A572 Grade 65 | \$4.25 |

Available in Types 1, 2, or 3 for most thickness and width combinations.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

HOT-ROLLED BANDS

ASTM A588

Hot-rolled high-strength, low-alloy carbon steel with improved atmospheric corrosion resistance intended for riveted, bolted, or welded structure. Coils are excluded from qualification to ASTM A588 until they are cut-to-length and processed into a finished structural product.

| | |
|---|--------|
| For Conversion to ASTM A588 Grades A or B | \$6.75 |
|---|--------|

ASTM A606

Hot-rolled high-strength, low-alloy carbon steel sheet with improved atmospheric corrosion resistance.

| | |
|--------|---------|
| Type 2 | \$9.50 |
| Type 4 | \$10.50 |

Widths other than 48", 60", and 72" may be subject to accumulation.

ASTM A786

Hot-rolled carbon steel floor plate, Pattern No. 4

| | |
|--|--------|
| ASTM A1011/A1018 Commercial Steel Type B | \$3.00 |
| ASTM A1011/A1018 SS Grade 36 Type 2 | \$4.00 |
| ASTM A1011 SS Grade 50 | \$4.00 |
| ASTM A1011/A1018 HSLAS Grade 50 Class 2 | \$5.00 |
| ASTM A1011/A1018 HSLAS Grade 55 Class 2 | \$5.50 |
| For Conversion to ASTM A36 | \$3.50 |
| For Conversion to ASTM A572 Grade 50 | \$5.00 |
| For Conversion to ASTM A572 Grade 55 | \$5.50 |
| SAE J403 1010 Modified | \$3.00 |

Widths other than 48", 60", and 72" and grades other than CS-B require two heats minimum.

ASTM A871

Hot-rolled high-strength, low-alloy carbon steel with improved atmospheric corrosion resistance intended for use in tubular structures and poles. Coils are excluded from qualification to ASTM A871 until they are cut-to-length and processed into a structural product.

| | |
|--------------------------------------|---------|
| For Conversion to ASTM A871 Grade 65 | \$11.50 |
|--------------------------------------|---------|

Available in Types 1 or 2.

SAE J403

Hot-rolled carbon steel

| | |
|---------------|--------|
| 1006 | Base |
| 1008 | Base |
| 1010 Modified | Base |
| 1015 | \$0.50 |
| 1018 | \$0.75 |
| 1020 | \$0.75 |
| 1021 | \$0.75 |
| 1022 | \$0.75 |
| 1026 | \$1.75 |
| 1035 | \$2.25 |

Additional boron-intensified steels (xxBxx) available on an inquiry-by-inquiry basis.

SAE J1392

Hot-rolled, high-strength, low-alloy carbon steel sheet

| | XLF | YLF | ZLF |
|-----|--------|---------|-----|
| 035 | \$0.75 | Inquire | N/A |
| 045 | \$1.75 | Inquire | N/A |
| 050 | \$2.25 | Inquire | N/A |
| 060 | \$3.75 | Inquire | N/A |
| 070 | \$5.00 | N/A | N/A |
| 080 | \$6.50 | N/A | N/A |

SAE J2340

Hot-rolled, high-strength, low-alloy carbon steel sheet

| | SF | XF | YF |
|-----|---------|--------|---------|
| 300 | \$2.75 | \$2.25 | Inquire |
| 340 | Inquire | \$2.75 | Inquire |
| 380 | N/A | \$3.25 | Inquire |
| 420 | N/A | \$4.25 | Inquire |
| 490 | N/A | \$5.50 | Inquire |
| 550 | N/A | \$7.00 | N/A |

ABRASION RESISTANT STEEL

Hot-rolled steel with improved abrasion resistance for use in moderate wear applications.

| | |
|-------|--------|
| AR200 | \$2.00 |
|-------|--------|

Additional material specifications suitable for conversion to certain ASTM and API Pipe & Tube specifications, as well as certain JIS, DIN, and manufacturer-specific standards available on an inquiry-by-inquiry basis.

STANDARD PROCESSING EXTRAS

| PICKLING | MILL EDGE | CUT EDGE |
|---------------------------|-----------|----------|
| From .500 min – .250 min | \$2.50 | \$3.00 |
| Under .250 min – .066 min | \$2.00 | \$2.50 |
| Under .066 min – .056 min | \$2.25 | \$2.75 |

TEMPER PASS

| | |
|---------------------------|--------|
| Under .120 min – .055 min | \$1.50 |
|---------------------------|--------|

Certain grade, thickness, and width combinations may not be available or may require external processing. Please refer to our product capabilities for more information.

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|---------------------|--------|
| 700 PIW to 1200 PIW | Base |
| Under 700 PIW | \$1.00 |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

MECHANICAL TESTING

| | |
|-----------------------|--------|
| Mechanical Properties | \$0.25 |
| Charpy Impact Test | \$0.25 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item. Please note that certain grade, thickness, and width combinations may require a minimum order quantity of up to 450 tons to avoid accumulation.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

COLD-ROLLED SHEET

Steel Dynamics base cold-rolled steel sheet has been cold-reduced to the specified thickness and subsequently annealed and temper-rolled to achieve the specified characteristics. Alternately, customers may specify a full-hard cold-rolled sheet that ships directly off the tandem mill. SDI cold-rolled sheet is produced on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" - <42" | 42" - <48" | 48" - 72" |
| 0.1020 | 0.0295 | 0.0980 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A109 | |
|--------------------------------|--------|
| Cold-rolled carbon steel strip | |
| No. 1 Temper (Full Hard) | Base |
| No. 3 Temper (Quarter Hard) | \$0.75 |

| ASTM A1008 | |
|---|-------------------------------|
| Cold-rolled carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Types A, B, & C | Base |
| Drawing Steel Types A & B | \$0.50 |
| Deep Drawing Steel | \$1.50 |
| Extra Deep Drawing Steel | \$2.75 |
| Structural Steels | |
| SS Grade 25 | \$0.50 |
| SS Grade 30 | \$0.50 |
| SS Grade 33 Type 1 | \$0.50 |
| SS Grade 40 Type 1 | \$0.75 |
| SS Grade 80 | \$0.50 |
| SS Grade 90 Modified | Inquire |
| High-Strength Low-Alloy Steels | Class 1 Class 2 |
| HSLAS Grade 45 | \$2.75 Inquire |
| HSLAS Grade 50 | \$3.25 \$2.75 |
| HSLAS Grade 55 | \$3.75 \$3.25 |
| HSLAS Grade 60 | Inquire \$4.00 |
| HSLAS Grade 70 | Inquire \$5.50 |
| High-Strength Low-Alloy Steels with Improved Formability | |
| HSLAS-F Grade 50 | \$3.25 |
| HSLAS-F Grade 60 | Inquire |

| ASTM A606 | |
|---|---------|
| Cold-rolled, high-strength, low-alloy carbon steel sheet with improved atmospheric corrosion resistance | |
| Type 4 Modified | Inquire |

Widths other than 48" 60", and 72" may be subject to accumulation.

| SAE J403 | |
|--------------------------------|--------|
| Cold-rolled carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1010 Modified | Base |
| 1018 | \$0.75 |
| 1020 | \$0.75 |
| 1021 | \$0.75 |

| SAE J1392 | | | |
|--|------------|------------|------------|
| Cold-rolled, high-strength, low-alloy carbon steel sheet | | | |
| | XLF | YLF | ZLF |
| 035 | \$1.50 | Inquire | Inquire |
| 040 | \$1.50 | Inquire | Inquire |
| 045 | \$1.75 | Inquire | Inquire |
| 050 | \$2.75 | Inquire | Inquire |

| SAE J2329 | |
|------------------------------------|--------|
| Cold-rolled low-carbon steel sheet | |
| Grade 2 Type U | \$0.75 |

| SAE J2340 | | | |
|--|-----------|-----------|-----------|
| Cold-rolled, high-strength, low-alloy carbon steel sheet | | | |
| | SF | XF | YF |
| 300 | Inquire | \$3.00 | Inquire |
| 340 | Inquire | \$3.50 | Inquire |
| 380 | Inquire | \$4.00 | Inquire |
| 420 | Inquire | \$4.50 | Inquire |
| 490 | Inquire | \$6.00 | Inquire |

Additional dent resistant grades available on an inquiry-by-inquiry basis.

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

COLD-ROLLED SHEET

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 60,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED HOT-ROLLED SHEET

Steel Dynamics base hot-rolled, hot-dipped galvanized product is a cost-effective solution for heavy-gauge, unexposed applications where mild surface defects such as coil breaks are not objectionable. Temper rolling may be specified to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is spangle-free and is provided on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 72" |
| 0.1600 | 0.0790 | 0.1560 | 0.0750 | \$3.00 | \$1.50 | Base |
| 0.0690 | 0.0600 | 0.0660 | 0.0560 | \$3.25 | \$1.75 | Base |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Types A & B & C | Base |
| Forming Steel Types A & B | \$0.50 |
| Structural Steels | |
| SS Grade 33 | \$0.50 |
| SS Grade 37 | \$0.50 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.00 |
| SS Grade 50 – Class 2 | \$0.75 |
| SS Grade 50 – Class 3 | \$1.00 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 – Modified for racking and purlin | \$1.75 |
| High-Strength Low-Alloy Steels | |
| HSLAS Grade 40 | \$1.50 |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 1 & 2 | \$3.25 |
| HSLAS Grade 60 | \$3.75 |
| HSLAS Grade 70 | \$5.00 |
| HSLAS Grade 80 | \$6.50 |
| High-Strength Low-Alloy Steels with Improved Formability | |
| HSLAS-F Grade 40 | \$1.75 |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 55 – Class 1 & 2 | \$3.50 |
| HSLAS-F Grade 60 | \$4.00 |
| HSLAS-F Grade 70 | \$5.25 |
| HSLAS-F Grade 80 | \$6.75 |

| ASTM A1003 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet for cold-forming framing members | |
| NS Grade 33 | \$0.50 |
| NS Grade 40 | \$0.50 |
| NS Grade 57 | \$1.75 |
| ST Grade 33H | \$0.50 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.00 |
| ST Grade 55H | \$1.25 |

| SAE J1392 | |
|--|--------|
| Hot-dipped galvanized, high-strength, low-alloy carbon steel sheet | |
| 040XLF | \$1.50 |
| 045XLF | \$1.75 |
| 050XLF | \$2.25 |
| 060XLF | \$3.75 |
| 070XLF | \$5.00 |
| 080XLF | \$6.50 |

| SAE J403 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1020 | \$0.75 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|---------------|--------|
| Spangle-Free | Base |
| Temper-Rolled | \$0.50 |

OTHER

| | |
|--------------------|----------|
| U.L. Certification | \$0.25 |
| Mill Edge | (\$0.50) |

Mill edge required on coating weights greater than G-100.

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|--------------------|---------|
| 20,000# to 60,000# | Base |
| Less than 20,000# | Inquire |

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Clear Acrylic | \$1.50 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped galvanized or galvanized product is suitable for a broad range of applications. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized and galvanized steel sheet is spangle-free and is provided on a 20" or 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" - <42" | 42" - <48" | 48" - 72" |
| 0.0850 | 0.0295 | 0.0810 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Types A & B & C | Base |
| Forming Steel Types A & B | \$0.50 |
| Deep Drawing Steel Types A & C | \$2.00 |
| Extra Deep Drawing Steel | \$2.75 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 – Modified for racking and purlin | \$1.75 |
| SS Grade 80 – Class 1 | \$0.50 |
| High-Strength Low-Alloy Steels | |
| HSLAS Grade 40 | \$1.50 |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 1 | \$3.25 |
| HSLAS Grade 55 – Class 2 | \$2.75 |
| HSLAS Grade 60 | \$3.75 |
| HSLAS Grade 70 | \$5.00 |
| HSLAS Grade 80 | \$6.50 |
| High-Strength Low-Alloy Steels with Improved Formability | |
| HSLAS-F Grade 40 | \$1.75 |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 55 | \$3.50 |
| HSLAS-F Grade 60 | \$4.00 |
| HSLAS-F Grade 70 | \$5.25 |
| HSLAS-F Grade 80 | \$6.75 |

| ASTM A1003 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet for cold-forming framing members | |
| NS Grade 33 | \$0.25 |
| NS Grade 40 | \$0.50 |
| NS Grade 57 | \$1.75 |
| ST Grade 33H | \$0.25 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.75 |
| ST Grade 55H | \$1.25 |

| SAE J1392 | |
|--|--------|
| Hot-dipped galvanized, high-strength, low-alloy carbon steel sheet | |
| 040XLF | \$1.50 |
| 045XLF | \$1.75 |
| 050XLF | \$2.25 |
| 060XLF | \$3.75 |
| 070XLF | \$5.00 |
| 080XLF | \$6.50 |

| SAE J2340 | |
|--|--------|
| Hot-dipped galvanized dent resistant, high-strength, and ultra high-carbon steel sheet | |
| 340XF | \$2.75 |
| 380XF | \$3.25 |
| 420XF | \$4.25 |
| 490XF | \$5.50 |
| 550XF | \$7.00 |

| SAE J403 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1020 | \$0.75 |

| SAE J2329 | |
|--|--------|
| Hot-dipped galvanized low-carbon steel sheet | |
| Grade 3 Type U | \$1.75 |
| Grade 4 Type U | \$3.00 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|--------------|--------|
| Spangle-Free | Base |
| Extra Smooth | \$0.50 |

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Clear Acrylic | \$1.50 |
| RoHS-Compliant Acrylic | \$2.00 |

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | Inquire |
| Less than 15,000# | Inquire |

OTHER

| | |
|--------------------|----------|
| Galvanneal | \$1.00 |
| U.L. Certification | \$0.25 |
| Mill Edge | (\$0.50) |

Mill edge required on coating weights greater than G-100, and only available on certain grades ordered as .030 minimum and heavier. Please refer to our product capabilities for more information.

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

GALVALUME® SHEET

Steel Dynamics GALVALUME® product offers excellent corrosion protection in many applications through the combination of the sacrificial protection of conventional zinc coatings with the excellent barrier protection of aluminum. This product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI GALVALUME® is produced with a regular spangle and is provided on either a 20" or 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 72" |
| 0.0470 | 0.0295 | 0.0500 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A792

Hot-dipped 55% aluminum-zinc alloy-coated carbon steel sheet

Mild Steels

| | |
|-------------------------|--------|
| Commercial Steel Type B | Base |
| Forming Steel Type A | \$0.50 |

Structural Steels

| | |
|-----------------------|--------|
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 80 – Class 1 | \$0.50 |

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|-----------------|--------|
| Regular Spangle | Base |
| Extra Smooth | \$0.50 |

SURFACE TREATMENT

| | |
|------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| Clear Acrylic | \$1.50 |
| RoHS-Compliant Acrylic | \$2.00 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | Inquire |
| Less than 15,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

ALUMINIZED TYPE 1 SHEET

Steel Dynamics Aluminized Type 1 product offers excellent corrosion protection in many applications through the combination of the aluminum/silicon coating. Based on this unique coating, the product also has outstanding heat resistance. Aluminized Type 1 is effective for applications up to 1250°F. This product may be specified as extra smooth in order to minimize the presence of cosmetic defects. Various surface treatments are available to further inhibit oxidation. SDI Aluminized Type 1 is produced with a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|-------------|--------------|
| Under | Thru | Under | Thru | 36" – <45" | 45" – 61.5" | >61.5" – 72" |
| 0.1340 | 0.0620 | 0.1300 | 0.0600 | \$2.50 | Base | \$1.00 |
| 0.0620 | 0.0290 | 0.0600 | 0.0280 | \$2.50 | Base | \$2.00 |
| 0.0290 | 0.0230 | 0.0280 | 0.0220 | \$3.00 | \$2.50 | \$3.50 |
| 0.0230 | 0.0200 | 0.0220 | 0.0190 | \$5.50 | \$5.00 | Inquire |
| 0.0200 | 0.0180 | 0.0190 | 0.0170 | \$7.00 | \$6.50 | Inquire |
| 0.0180 | 0.0170 | 0.0170 | 0.0160 | Inquire | Inquire | Inquire |
| 0.0170 | 0.0160 | 0.0160 | 0.0150 | Inquire | Inquire | Inquire |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | Inquire | Inquire | Inquire |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | Inquire | Inquire | Inquire |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | Inquire | Inquire | Inquire |

Aluminized Type 1 Cold Rolled Minimum Thickness

| Under | Thru |
|-------|--------|
| 0.096 | 0.0120 |

Aluminized Type 1 Hot Rolled Minimum Thickness

| Under | Thru |
|---------|---------|
| Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A463

Hot-dipped, coated layer of aluminum/silicon alloy (5% to 11% silicon)

Mild Steels

| | |
|------------------------------------|---------|
| Commercial Steel Type A, B or C | Base |
| Forming Steel | \$0.60 |
| Deep Drawing Steel (DDS) | \$2.25 |
| Extra Deep Drawing Steel (EDDS) | \$4.00 |
| Drawing Quality - High Performance | Inquire |

Structural Steels

| | |
|---------------------------|--------|
| Structural Steel Grade 33 | \$0.75 |
| Structural Steel Grade 37 | \$0.85 |
| Structural Steel Grade 40 | \$1.15 |

High Strength Low Alloy Steels

| | |
|---|--------|
| High Strength Low Alloy Steel - Grade 50A | \$4.10 |
| High Strength Low Alloy Steel - Grade 50B | \$4.35 |

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|-----------------|--------|
| Regular Spangle | Base |
| Extra Smooth | \$1.50 |

SURFACE TREATMENT

| | |
|-----------------------|------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |

PLEASE REFERENCE THE ATTACHED COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | Inquire |
| Less than 15,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

ALUMINIZED TYPE 2 SHEET

Steel Dynamics Aluminized Type 2 product offers excellent corrosion protection in many applications through the product's pure aluminum coating. Aluminized Type 2 is highly effective for exterior applications due to the coating's distinctive barrier protection. This product may be specified as extra smooth in order to minimize the presence of cosmetic defects. Various surface treatments are available to further inhibit oxidation. SDI Aluminized Type 2 is produced with a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|-------------|--------------|
| Under | Thru | Under | Thru | 36" – <45" | 45" – 61.5" | >61.5" – 72" |
| 0.1630 | 0.0620 | 0.1600 | 0.0600 | \$2.50 | Base | \$1.00 |
| 0.0620 | 0.0290 | 0.0600 | 0.0280 | \$2.50 | Base | \$2.00 |
| 0.0290 | 0.0230 | 0.0280 | 0.0220 | \$3.00 | \$2.50 | \$3.50 |
| 0.0230 | 0.0200 | 0.0220 | 0.0190 | \$5.50 | \$5.00 | Inquire |
| 0.0200 | 0.0180 | 0.0190 | 0.0170 | \$7.00 | \$6.50 | Inquire |
| 0.0180 | 0.0170 | 0.0170 | 0.0160 | Inquire | Inquire | Inquire |
| 0.0170 | 0.0160 | 0.0160 | 0.0150 | Inquire | Inquire | Inquire |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | Inquire | Inquire | Inquire |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | Inquire | Inquire | Inquire |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | Inquire | Inquire | Inquire |

Aluminized Type 2 Cold Rolled Minimum Thickness

| Under | Thru |
|-------|--------|
| 0.096 | 0.0120 |

Aluminized Type 2 Hot Rolled Minimum Thickness

| Under | Thru |
|--------|---------|
| 0.1600 | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A463

Hot-dipped, coated layer of aluminum/silicon alloy (5% to 11% silicon)

Mild Steels

| | |
|---------------------------------|------|
| Commercial Steel Type A, B or C | Base |
|---------------------------------|------|

Structural Steels

| | |
|---------------------------|--------|
| Structural Steel Grade 33 | \$0.75 |
| Structural Steel Grade 37 | \$0.85 |
| Structural Steel Grade 40 | \$1.15 |

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|-----------------|--------|
| Regular Spangle | Base |
| Extra Smooth | \$1.50 |

SURFACE TREATMENT

| | |
|-----------------------|------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |

PLEASE REFERENCE THE ATTACHED COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | Inquire |
| Less than 15,000# | Inquire |


MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

HEARTLAND DIVISION

Terre Haute, Indiana

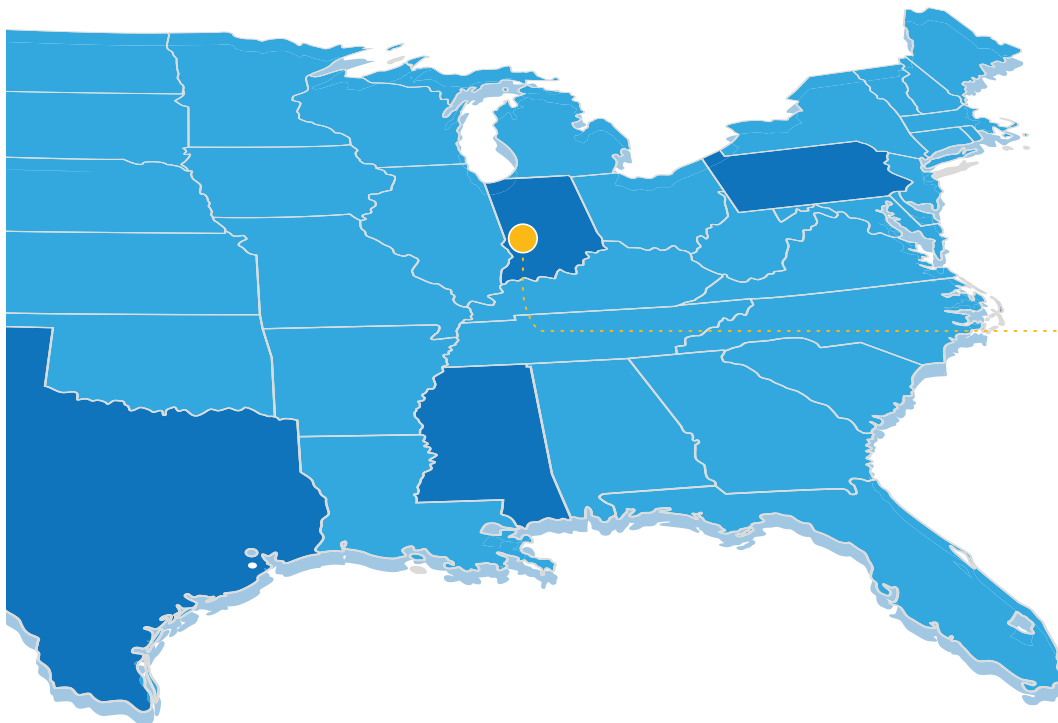

Heartland Division
Terre Haute, Indiana

Heartland Division
455 West Industrial Drive
Terre Haute, Indiana 47802
(812) 299-4157

HOT-ROLLED PICKLED

Steel Dynamics hot-rolled pickled sheet is provided on a 24" ID and can be ordered as oiled or dry. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 72" |
| 0.2230 | 0.0840 | 0.2200 | 0.0810 | \$4.00 | \$2.00 | Base |
| 0.0840 | 0.0690 | 0.0810 | 0.0660 | \$4.50 | \$2.50 | \$0.50 |
| 0.0690 | 0.0580 | 0.0660 | 0.0550 | \$6.50 | \$4.50 | \$2.50 |
| 0.0580 | 0.0530 | 0.0550 | 0.0500 | \$7.00 | \$5.00 | \$3.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A1011 & ASTM A1018 | | |
|---|----------------|----------------|
| Hot-rolled carbon steel sheet | | |
| Mild Steels | | |
| Commercial Steel Type A, B, C & D | | Base |
| Drawing Steel Type A | | \$0.50 |
| Drawing Steel Type B (Boron) | | \$0.50 |
| Drawing Steel Type B (Titanium) | | \$0.75 |
| Structural Steels | | |
| SS Grade 30 | | \$0.50 |
| SS Grade 33 | | \$0.50 |
| SS Grade 36 Type 1 | | \$0.50 |
| SS Grade 36 Type 2 | | \$1.00 |
| SS Grade 40 | | \$0.50 |
| SS Grade 45 | | \$0.50 |
| SS Grade 50 | | \$1.25 |
| SS Grade 55 | | \$1.50 |
| SS Grade 57 Modified for racking and purlin | | \$1.75 |
| High-Strength Low-Alloy Steels | Class 1 | Class 2 |
| HSLAS Grade 45 | Inquire | Inquire |
| HSLAS Grade 50 | Inquire | Inquire |
| HSLAS Grade 55 | Inquire | Inquire |
| HSLAS Grade 60 | Inquire | Inquire |
| HSLAS Grade 65 | Inquire | Inquire |
| HSLAS Grade 70 | Inquire | Inquire |
| High-Strength Low-Alloy Steels with improved formability | | |
| HSLAS-F Grade 50 | | Inquire |
| HSLAS-F Grade 60 | | Inquire |
| HSLAS-F Grade 70 | | Inquire |
| HSLAS-F Grade 80 | | Inquire |

| SAE J403 | |
|-------------------------|--------|
| Hot-rolled carbon steel | |
| 1005 | Base |
| 1006 | Base |
| 1008 | Base |
| 1010 | \$0.50 |
| 1015 | \$0.50 |
| 1017 | \$0.50 |
| 1018 | \$0.75 |
| 1020 | \$0.75 |
| 1021 | \$0.75 |
| 1022 | \$0.75 |

Additional boron-intensified steels (xxBxx) available on an inquiry-by-inquiry basis.

STANDARD PROCESSING EXTRAS

| PICKLING | MILL EDGE | CUT EDGE |
|---------------------------|-----------|----------|
| Under .187 min – .066 min | \$2.00 | \$2.50 |
| Under .066 min – .039 min | \$2.25 | \$2.75 |

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|---------------------|---------|
| 700 PIW to 1200 PIW | Base |
| Under 700 PIW | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item. Please note that certain grade, thickness, and width combinations may require a minimum order quantity of up to 450 tons to avoid accumulation.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

COLD-ROLLED SHEET

Steel Dynamics base cold-rolled steel sheet has been cold-reduced to the specified thickness and subsequently annealed and temper-rolled to achieve the specified characteristics. Alternately, customers may specify a full-hard cold-rolled sheet with off-gauge heads and tails cropped at the temper mill. SDI's cold-rolled sheet is produced on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 72" |
| 0.0620 | 0.0295 | 0.0600 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |
| 0.0130 | 0.0110 | 0.0120 | 0.0100 | Inquire | Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A109 | |
|--------------------------------|---------|
| Cold-rolled carbon steel strip | |
| No. 1 Temper (Full Hard) | Base |
| No. 2 Temper (Half Hard) | Inquire |
| No. 3 Temper (Quarter Hard) | Inquire |

| ASTM A1008 | |
|--------------------------------|---------|
| Cold-rolled carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Drawing Steel Types A & B | \$0.50 |
| Deep Drawing Steel | Inquire |
| Structural Steels | |
| SS Grade 25 | Inquire |
| SS Grade 30 | Inquire |
| SS Grade 33 Type 1 | Inquire |
| SS Grade 40 Type 1 | Inquire |
| SS Grade 80 | Inquire |

| SAE J403 | |
|--------------------------------|---------|
| Cold-rolled carbon steel sheet | |
| 1006 | Inquire |
| 1008 | Inquire |
| 1015 | Inquire |
| 1017 | Inquire |
| 1018 | Inquire |
| 1020 | Inquire |
| 1021 | Inquire |

GENERAL EXTRAS

| MAXIMUM COIL WEIGHT | |
|------------------------------|---------|
| 20,000# to 60,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |

| MINIMUM LINE ITEM QUANTITY | |
|----------------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

| MECHANICAL TESTING | |
|-----------------------|--------|
| Mechanical Properties | \$0.25 |

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped galvanized product is suitable for a broad range of applications. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation and enhance formability. SDI galvanized steel sheet is provided on either a 20" or 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 36" – <42" | 42" – <48" | 48" – 72" |
| 0.0620 | 0.0295 | 0.0600 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |
| 0.0130 | 0.0110 | 0.0120 | 0.0100 | Inquire | Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type A & B | Base |
| Forming Steel Type A & B | \$0.50 |
| Forming Steel Modified | \$1.00 |
| Deep Drawing Steel | \$2.00 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 80 – Class 1 | \$0.50 |

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 60,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|-----------------|--------|
| Regular Spangle | Base |
| Extra Smooth | \$0.50 |

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Clear Acrylic | \$1.50 |

OTHER

| | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

MINIMUM LINE ITEM QUANTITY


| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

SOUTHWEST-SINTON DIVISION

Sinton, Texas

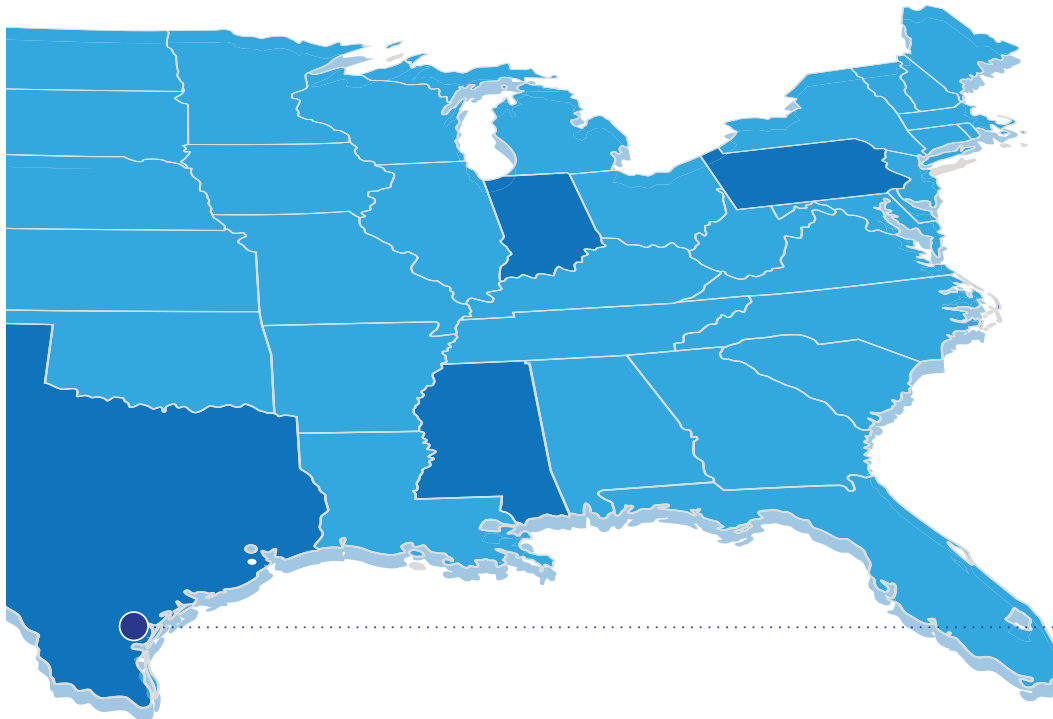

**Southwest-Sinton
Division**
Sinton, Texas

Southwest-Sinton Division

8534 Hwy 89
Sinton, TX 78387
(361) 424-6200

HOT-ROLLED BANDS

Steel Dynamics base hot-rolled steel sheet is an unprocessed band directly off the hot-strip mill and has not been side-trimmed or cropped back to gauge. As rolled, hot bands may be susceptible to coil breaks. Additional processing such as temper passing, pickling, edge trimming and tension leveling are available on site or via a qualified external processor. SDI hot-rolled bands are produced on a 30" ID. All processed hot-rolled steel sheet will be provided on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | | |
|-------------------|-------|-------------------|-------|------------|-----------|------------|------------|
| Under | Thru | Under | Thru | 40" - <48" | 48" - 72" | >72" - 76" | >76" - 84" |
| 1.008 | 0.756 | 1.000 | 0.750 | Inquire | Inquire | Inquire | Inquire |
| 0.756 | 0.084 | 0.750 | 0.081 | \$2.00 | Base | \$0.50 | Inquire |
| 0.084 | 0.069 | 0.081 | 0.066 | \$2.50 | \$0.50 | \$1.50 | Inquire |
| 0.069 | 0.058 | 0.066 | 0.055 | \$4.50 | \$2.50 | Inquire | Inquire |
| 0.058 | 0.050 | 0.055 | 0.047 | \$5.00 | \$3.00 | Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A1011 & ASTM A1018

Hot-rolled carbon steel sheet

Mild Steels

| | |
|------------------------------|--------|
| Commercial Steel Types A & B | Base |
| Drawing Steel Types A & B | \$0.50 |

Structural Steels

| | |
|---|--------|
| SS Grade 30 | \$0.50 |
| SS Grade 33 | \$0.50 |
| SS Grade 36 Type 1 | \$0.50 |
| SS Grade 36 Type 2 | \$1.00 |
| SS Grade 40 | \$0.50 |
| SS Grade 45 | \$0.50 |
| SS Grade 50 | \$1.25 |
| SS Grade 55 | \$1.50 |
| SS Grade 57 Modified for racking and purlin | \$1.75 |

High-Strength Low-Alloy Steels

| | Class 1 | Class 2 |
|----------------|---------|---------|
| HSLAS Grade 45 | \$2.25 | \$1.75 |
| HSLAS Grade 50 | \$2.75 | \$2.25 |
| HSLAS Grade 55 | \$3.25 | \$2.75 |
| HSLAS Grade 60 | \$4.25 | \$3.75 |
| HSLAS Grade 65 | \$4.75 | \$4.25 |
| HSLAS Grade 70 | \$5.50 | \$5.00 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|------------------|--------|
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 60 | \$4.00 |
| HSLAS-F Grade 70 | \$5.25 |
| HSLAS-F Grade 80 | \$6.50 |

Ultra-High-Strength Steels

| | |
|-----------------------|---------|
| UHSS Grade 90 Type 1 | Inquire |
| UHSS Grade 100 Type 1 | Inquire |

ASTM A36

Hot-rolled carbon steel sheet used for general structural purposes. Coils are excluded from qualification to ASTM A36 until they are cut-to-length and processed into a finished structural product.

| | |
|----------------------------|--------|
| For Conversion to ASTM A36 | \$0.50 |
|----------------------------|--------|

COPPER SPECIFIED (> .20%)

\$1.50

ASTM A283

Low and intermediate tensile strength carbon steel of structural quality for general application. Coils are excluded from qualification to ASTM A283 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil.

| | |
|-------------------------------------|--------|
| For Conversion to ASTM A283 Grade C | \$0.50 |
|-------------------------------------|--------|

ASTM A285

Low and intermediate tensile strength carbon steel for pressure vessels. Coils are excluded from qualification to ASTM A285 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil.

| | |
|-------------------------------------|--------|
| For Conversion to ASTM A285 Grade C | \$0.50 |
|-------------------------------------|--------|

ASTM A414

Hot-rolled high-strength, low-alloy carbon steel sheet for pressure vessels. Coils are excluded from qualification to ASTM A414 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil.

| | |
|-------------------------------------|---------|
| For Conversion to ASTM A414 Grade C | Inquire |
| For Conversion to ASTM A414 Grade G | Inquire |

ASTM A455

High tensile strength hot-rolled carbon-manganese steel for pressure vessels. Coils are excluded from qualification to ASTM A455 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil.

| | |
|-------------------------------------|---------|
| For Conversion to ASTM A455 Grade G | Inquire |
|-------------------------------------|---------|

ASTM A516

Hot-rolled carbon steel intended for service in pressure vessels for moderate- to lower-temperature service. Coils are excluded from qualification to ASTM A516 until they are cut-to-length. Processor is responsible for testing and certifying tensile from center of coil.

| | |
|--------------------------------------|---------|
| For Conversion to ASTM A516 Grade 70 | Inquire |
|--------------------------------------|---------|

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

HOT-ROLLED BANDS

ASTM A572

Hot-rolled high-strength, low-alloy columbium-vanadium carbon steel intended for riveted, bolted, or welded structures. Coils are excluded from qualification to ASTM A572 until they are cut-to-length and processed into a finished structural product.

| | |
|--------------------------------------|--------|
| For Conversion to ASTM A572 Grade 50 | \$2.25 |
| For Conversion to ASTM A572 Grade 55 | \$2.75 |
| For Conversion to ASTM A572 Grade 60 | \$3.75 |
| For Conversion to ASTM A572 Grade 65 | \$4.25 |

Available in Types 1, 2, or 3 for most thickness and width combinations.

ASTM A588

Hot-rolled high-strength, low-alloy carbon steel with improved atmospheric corrosion resistance intended for riveted, bolted, or welded structure. Coils are excluded from qualification to ASTM A588 until they are cut-to-length and processed into a finished structural product.

| | |
|---|--------|
| For Conversion to ASTM A588 Grades A or B | \$6.75 |
|---|--------|

ASTM A606

Hot-rolled high-strength, low-alloy carbon steel sheet with improved atmospheric corrosion resistance.

| | |
|--------|---------|
| Type 4 | \$10.50 |
|--------|---------|

Widths other than 48", 60", and 72" may be subject to accumulation.

ASTM A786

Hot-rolled carbon steel floor plate, Pattern No. 4

| | |
|--|--------|
| ASTM A1011/A1018 Commercial Steel Type B | \$3.00 |
| ASTM A1011/A1018 SS Grade 36 Type 2 | \$4.00 |
| ASTM A1011/A1018 HSLAS Grade 50 Class 1 | \$5.00 |
| For Conversion to ASTM A36 | \$3.50 |
| For Conversion to ASTM A572 Grade 50 | \$5.00 |
| SAE J403 1010 Modified | \$3.00 |

Available in Types 1, 2, or 3 for most thickness and width combinations. Widths other than 48", 60", 72", and 84" may be subject to accumulation.

STANDARD PROCESSING EXTRAS

| PICKLING | MILL EDGE | CUT EDGE |
|---------------------------|-----------|----------|
| Under .250 min – .066 min | \$2.00 | \$2.50 |
| Under .066 min – .056 min | \$2.25 | \$2.75 |

78" maximum width.

TEMPER PASS

| | |
|---------------------------|---------|
| Under .158 min – .047 min | Inquire |
|---------------------------|---------|

Certain grade, thickness, and width combinations may not be available or may require external processing. Please refer to our product capabilities for more information.

ASTM A871

Hot-rolled high-strength, low-alloy carbon steel with improved atmospheric corrosion resistance intended for use in tubular structures and poles. Coils are excluded from qualification to ASTM A871 until they are cut-to-length and processed into a structural product.

| | |
|--------------------------------------|---------|
| For Conversion to ASTM A871 Grade 65 | \$11.50 |
|--------------------------------------|---------|

Available in Types 1 or 2.

SAE J403

Hot-rolled carbon steel

| | |
|---------------|--------|
| 1006 | Base |
| 1008 | Base |
| 1010 Modified | Base |
| 1018 | \$0.75 |
| 1020 | \$0.75 |
| 1021 | \$0.75 |
| 1022 | \$0.75 |
| 1026 | \$1.75 |

SAE J1392

Hot-rolled high-strength, low-alloy carbon steel sheet

| | XLF | YLF | ZLF |
|-----|--------|---------|---------|
| 035 | \$0.75 | Inquire | Inquire |
| 045 | \$1.75 | Inquire | Inquire |
| 050 | \$2.25 | Inquire | Inquire |
| 060 | \$3.75 | Inquire | Inquire |

SAE J2340

Hot-rolled high-strength, low-alloy carbon steel sheet

| | SF | XF | YF |
|-----|---------|---------|---------|
| 300 | Inquire | \$2.25 | Inquire |
| 340 | Inquire | \$2.75 | Inquire |
| 380 | N/A | \$3.25 | Inquire |
| 420 | N/A | Inquire | Inquire |

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|---------------------|--------|
| 700 PIW to 1300 PIW | Base |
| Under 700 PIW | \$1.00 |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

MECHANICAL TESTING

| | |
|-----------------------|--------|
| Mechanical Properties | \$0.25 |
| Charpy Impact Test | \$0.25 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item. Please note that certain grade, thickness, and width combinations may require a minimum order quantity of up to 400 tons to avoid accumulation.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

PLATE

Steel Dynamics coiled strip mill plate is a band produced on the hot mill and converted to finished plates by stretcher leveling and cut-to-length processes, which are performed on-site by a qualified processing partner. Our plate products are produced to a specified nominal thickness and are sold based on theoretical nominal weight according to the following calculation: Nominal thickness x Width x Length x .2836.

TYPICAL PLATE SIZES (additional dimensions are available):

| | |
|---------------|--|
| Nominal Gauge | 3/16", 1/4", 5/16", 3/8", 1/2", 5/8", 3/4", 1" |
| Width | 48", 60", 72", 84" |
| Length | 240" through 650" |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A36

Hot-rolled carbon steel used for general structural purposes.

| | |
|----------|-------|
| ASTM A36 | Base* |
|----------|-------|

* Grade extra included in base price.

| | |
|-------------------------------------|--------|
| COPPER SPECIFIED (> .20%) | \$1.50 |
|-------------------------------------|--------|

ASTM A283

Low and intermediate tensile strength carbon steel of structural quality for general application.

| | |
|-------------------|--------|
| ASTM A283 Grade C | \$0.50 |
|-------------------|--------|

ASTM A285

Low and intermediate tensile strength carbon steel for pressure vessels.

| | |
|-------------------|--------|
| ASTM A285 Grade C | \$0.50 |
|-------------------|--------|

ASTM A414

Hot-rolled high-strength, low-alloy carbon steel for pressure vessels.

| | |
|-------------------|---------|
| ASTM A414 Grade C | Inquire |
|-------------------|---------|

| | |
|-------------------|---------|
| ASTM A414 Grade G | Inquire |
|-------------------|---------|

ASTM A455

High tensile strength hot-rolled carbon-manganese steel for pressure vessels.

| | |
|-------------------|---------|
| ASTM A455 Grade G | Inquire |
|-------------------|---------|

ASTM A516

Hot-rolled carbon steel intended for service in pressure vessels for moderate-to-lower-temperature service.

| | |
|--------------------|---------|
| ASTM A516 Grade 70 | Inquire |
|--------------------|---------|

ASTM A572

Hot-rolled high-strength, low-alloy columbium-vanadium carbon steel intended for riveted, bolted, or welded structures.

| | |
|--------------------|--------|
| ASTM A572 Grade 50 | \$2.25 |
| ASTM A572 Grade 55 | \$2.75 |
| ASTM A572 Grade 60 | \$3.75 |
| ASTM A572 Grade 65 | \$4.25 |

Available in Types 1, 2, or 3 for most thickness and width combinations.

ASTM A588

Hot-rolled high-strength, low-alloy carbon steel with improved atmospheric corrosion resistance intended for riveted, bolted, or welded structure.

| | |
|-------------------------|--------|
| ASTM A588 Grades A or B | \$6.75 |
|-------------------------|--------|

ASTM A656

Hot-rolled high-strength, low-alloy steel with improved formability.

| | |
|-----------|---------|
| Grade 50 | \$2.50 |
| Grade 60 | \$4.00 |
| Grade 70 | \$5.25 |
| Grade 80 | \$6.50 |
| Grade 100 | Inquire |

Available in Types 3 or 7.

ASTM A709 – AASHTO M270

Hot-rolled carbon steel and high-strength low-alloy steel used as structural plates.

| | |
|-----------------|---------|
| Grade 36 | \$0.50 |
| Grade 50 | \$1.25 |
| Grade 50 Type 2 | \$2.25 |
| Grade 50 W | Inquire |

ASTM A786

Hot-rolled carbon steel floor plate, pattern number 4.

| | |
|--------------------|--------|
| ASTM A36 | \$3.50 |
| ASTM A572 Grade 50 | \$5.00 |

Available in Types 1, 2, or 3 for most thickness and width combinations. Widths other than 48", 60", 72", and 84" may be subject to accumulation.

ASTM A871

Hot-rolled high-strength, low-alloy carbon steel with improved atmospheric corrosion resistance intended for use in tubular structures and poles.

| | |
|--------------------|---------|
| ASTM A871 Grade 65 | \$11.50 |
|--------------------|---------|

Available in Types 1 or 2.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on theoretical pounds per plate. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

PLATE

STANDARD PROCESSING EXTRAS

| PICKLING | MILL EDGE | CUT EDGE |
|----------------|-----------|----------|
| 3/16" and 1/4" | \$2.00 | \$2.50 |

78" maximum width mill edge.

LIFT WEIGHTS

| | |
|-----------|--------|
| ≥ 10 Tons | Base |
| < 10 Tons | \$1.00 |

EDGE CONDITION

| | |
|-----------|--------|
| Cut Edge | \$3.00 |
| Mill Edge | Base |

LENGTH

| | |
|-------------|--------|
| < 96" | \$1.00 |
| 96" to 480" | Base |
| > 480" | \$1.00 |

GENERAL EXTRAS

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|---------|
| ≥ 20 tons | Base |
| 10 to < 20 tons | \$1.00 |
| Exact Piece Count | Inquire |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item. Please note that certain grade, thickness, and width combinations may require a minimum order quantity of up to 400 tons to avoid accumulation.

MECHANICAL TESTING

| | |
|-----------------------|--------|
| Mechanical Properties | \$0.25 |
| Charpy Impact Test | \$0.25 |

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on theoretical pounds per plate. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

COLD-ROLLED SHEET

Steel Dynamics base cold-rolled steel sheet has been cold-reduced to the specified thickness and subsequently annealed and temper-rolled to achieve the specified characteristics. Alternately, customers may specify a full-hard cold-rolled sheet that ships directly off the tandem mill. SDI cold-rolled sheet is produced on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | |
|-------------------|--------|-------------------|--------|------------|------------|-----------|
| Under | Thru | Under | Thru | 38" - <42" | 42" - <48" | 48" - 76" |
| 0.1020 | 0.0295 | 0.1000 | 0.0280 | \$3.00 | \$1.50 | Base |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 |
| 0.0130 | 0.0110 | 0.0120 | 0.0100 | Inquire | Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A109 | | |
|--------------------------------|--|------|
| Cold-rolled carbon steel strip | | |
| No. 1 Temper (Full Hard) | | Base |

| ASTM A1008 | | |
|---|----------------|----------------|
| Cold-rolled carbon steel sheet | | |
| Mild Steels | | |
| Commercial Steel Types A, B, & C | | Base |
| Drawing Steel Types A & B | | \$0.50 |
| Deep Drawing Steel | | \$1.50 |
| Extra Deep Drawing Steel | | Inquire |
| Structural Steels | | |
| SS Grade 25 | | \$0.50 |
| SS Grade 30 | | \$0.50 |
| SS Grade 33 Type 1 | | \$0.50 |
| SS Grade 40 Type 1 | | \$0.75 |
| SS Grade 80 | | \$0.50 |
| SS Grade 90 Modified | | Inquire |
| High-Strength Low-Alloy Steels | | |
| | Class 1 | Class 2 |
| HSLAS Grade 45 | \$2.75 | Inquire |
| HSLAS Grade 50 | \$3.25 | \$2.75 |
| HSLAS Grade 55 | Inquire | Inquire |
| HSLAS Grade 60 | Inquire | Inquire |
| High-Strength Low-Alloy Steels with Improved Formability | | |
| HSLAS-F Grade 50 | | \$3.25 |

| ASTM A606 | | |
|---|--|---------|
| Cold-rolled, high-strength, low-alloy carbon steel sheet with improved atmospheric corrosion resistance | | |
| Type 4 Modified | | Inquire |

Widths other than 48" 60", and 72" may be subject to accumulation.

| SAE J403 | |
|--------------------------------|--------|
| Cold-rolled carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1010 Modified | Base |
| 1018 | \$0.75 |
| 1020 | \$0.75 |
| 1021 | \$0.75 |

| SAE J1392 | | | |
|--|------------|------------|------------|
| Cold-rolled, high-strength, low-alloy carbon steel sheet | | | |
| | XLF | YLF | ZLF |
| 035 | \$1.50 | Inquire | Inquire |
| 040 | \$1.50 | Inquire | Inquire |
| 045 | \$1.75 | Inquire | Inquire |
| 050 | \$2.75 | Inquire | Inquire |

| SAE J2340 | | | |
|--|-----------|-----------|-----------|
| Cold-rolled, high-strength, low-alloy carbon steel sheet | | | |
| | SF | XF | YF |
| 300 | Inquire | \$3.00 | Inquire |
| 340 | Inquire | \$3.50 | Inquire |
| 380 | Inquire | Inquire | Inquire |
| 420 | Inquire | Inquire | Inquire |
| 490 | Inquire | Inquire | Inquire |

Additional dent resistant grades available on an inquiry-by-inquiry basis.

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

COLD-ROLLED SHEET

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 105,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

MECHANICAL TESTING

| | |
|-----------------------|--------|
| Mechanical Properties | \$0.25 |
|-----------------------|--------|

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED HOT-ROLLED SHEET

Steel Dynamics base hot-rolled, hot-dipped galvanized product is a cost-effective solution for heavy-gauge, unexposed applications where mild surface defects such as coil breaks are not objectionable. Temper rolling may be specified to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is spangle-free and is provided on a 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | | |
|-------------------|-------|-------------------|-------|------------|------------|------------|-----------|
| Under | Thru | Under | Thru | 38" - <42" | 42" - <48" | 48" - <72" | 72" - 76" |
| 0.160 | 0.069 | 0.155 | 0.066 | \$3.00 | \$1.50 | Base | Inquire |
| 0.069 | 0.055 | 0.066 | 0.052 | \$3.25 | \$1.75 | Base | Inquire |
| 0.055 | 0.050 | 0.052 | 0.047 | \$3.50 | \$2.00 | Base | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Types A & B | Base |
| Forming Steel Types A & B | \$0.50 |
| Structural Steels | |
| SS Grade 33 | \$0.50 |
| SS Grade 37 | \$0.50 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.00 |
| SS Grade 50 – Class 2 | \$0.75 |
| SS Grade 50 – Class 3 | \$1.00 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 – Modified for racking and purlin | \$1.75 |
| High-Strength Low-Alloy Steels | |
| HSLAS Grade 40 | \$1.50 |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 1 & 2 | \$3.25 |
| HSLAS Grade 60 | \$3.75 |
| HSLAS Grade 70 | \$5.00 |
| HSLAS Grade 80 | \$6.50 |
| High-Strength Low-Alloy Steels with Improved Formability | |
| HSLAS-F Grade 40 | \$1.75 |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 55 – Class 1 & 2 | \$3.50 |
| HSLAS-F Grade 60 | \$4.00 |
| HSLAS-F Grade 70 | \$5.25 |
| HSLAS-F Grade 80 | \$6.75 |

| ASTM A1003 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet for cold-forming framing members | |
| NS Grade 33 | \$0.50 |
| NS Grade 40 | \$0.50 |
| NS Grade 57 | \$1.75 |
| ST Grade 33H | \$0.50 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.00 |
| ST Grade 55H | \$1.25 |

| SAE J1392 | |
|--|--------|
| Hot-dipped galvanized, high-strength, low-alloy carbon steel sheet | |
| 040XLF | \$1.50 |
| 045XLF | \$1.75 |
| 050XLF | \$2.25 |
| 060XLF | \$3.75 |
| 070XLF | \$5.00 |
| 080XLF | \$6.50 |

| SAE J403 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1020 | \$0.75 |

Additional JIS, DIN, and manufacturer-specific standards available on an inquiry-by-inquiry basis.

STANDARD PROCESSING EXTRAS

| SURFACE FINISH | |
|----------------|--------|
| Spangle-Free | Base |
| Temper-Rolled | \$0.50 |

| OTHER | |
|--------------------|----------|
| U.L. Certification | \$0.25 |
| Mill Edge | (\$0.50) |

Mill edge required on coating weights greater than G-100.

GENERAL EXTRAS

| MAXIMUM COIL WEIGHT | |
|---------------------|---------|
| 20,000# to 60,000# | Base |
| Less than 20,000# | Inquire |

| SURFACE TREATMENT | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Clear Acrylic | \$1.50 |

Please reference the attached metallic coating extras.

| MINIMUM LINE ITEM QUANTITY | |
|----------------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped galvanized product is suitable for a broad range of applications. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is spangle-free and is provided on a 20" or 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | | |
|-------------------|--------|-------------------|--------|------------|------------|------------|-----------|
| Under | Thru | Under | Thru | 38" - <42" | 42" - <48" | 48" - <72" | 72" - 76" |
| 0.1000 | 0.0295 | 0.0960 | 0.0280 | \$3.00 | \$1.50 | Base | Inquire |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 | Inquire |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 | Inquire |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 | Inquire |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 | Inquire |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 | Inquire |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 | Inquire |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 | Inquire |
| 0.0130 | 0.0110 | 0.0120 | 0.0100 | Inquire | Inquire | Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Types A & B & C | Base |
| Forming Steel Types A & B | \$0.50 |
| Deep Drawing Steel Types A & C | \$2.00 |
| Extra Deep Drawing Steel | \$2.75 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 – Modified for racking and purlin | \$1.75 |
| SS Grade 80 – Class 1 | \$0.50 |
| High-Strength Low-Alloy Steels | |
| HSLAS Grade 40 | \$1.50 |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 1 | \$3.25 |
| HSLAS Grade 55 – Class 2 | \$2.75 |
| HSLAS Grade 60 | \$3.75 |
| HSLAS Grade 70 | \$5.00 |
| HSLAS Grade 80 | \$6.50 |
| High-Strength Low-Alloy Steels with Improved Formability | |
| HSLAS-F Grade 40 | \$1.75 |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 55 | \$3.50 |
| HSLAS-F Grade 60 | \$4.00 |
| HSLAS-F Grade 70 | \$5.25 |
| HSLAS-F Grade 80 | \$6.75 |

| ASTM A1003 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet for cold-forming framing members | |
| NS Grade 33 | \$0.25 |
| NS Grade 40 | \$0.50 |
| NS Grade 57 | \$1.75 |
| ST Grade 33H | \$0.25 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.75 |
| ST Grade 55H | \$1.25 |

| SAE J1392 | |
|--|--------|
| Hot-dipped galvanized, high-strength, low-alloy carbon steel sheet | |
| 040XLF | \$1.50 |
| 045XLF | \$1.75 |
| 050XLF | \$2.25 |
| 060XLF | \$3.75 |
| 070XLF | \$5.00 |
| 080XLF | \$6.50 |

| SAE J2340 | |
|--|--------|
| Hot-dipped galvanized dent resistant, high-strength, and ultra high-carbon steel sheet | |
| 340XF | \$2.75 |
| 380XF | \$3.25 |
| 420XF | \$4.25 |
| 490XF | \$5.50 |
| 550XF | \$7.00 |

| SAE J403 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| 1006 | Base |
| 1008 | Base |
| 1020 | \$0.75 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|--------------|--------|
| Spangle-Free | Base |
| Extra Smooth | \$0.50 |

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Clear Acrylic | \$1.50 |
| RoHS-Compliant Acrylic | \$2.00 |

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | Inquire |
| Less than 15,000# | Inquire |

OTHER

| | |
|--------------------|----------|
| U.L. Certification | \$0.25 |
| Mill Edge | (\$0.50) |

Mill edge required on coating weights greater than G-100, and only available on certain grades ordered as .030 minimum and heavier. Please refer to our product capabilities for more information.

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

GALVALUME® SHEET

Steel Dynamics GALVALUME® product offers excellent corrosion protection in many applications through the combination of the sacrificial protection of conventional zinc coatings with the excellent barrier protection of aluminum. This product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI GALVALUME® is produced with a regular spangle and is provided on either a 20" or 24" ID. Our products are produced to a specified minimum or nominal thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Nominal Thickness | | Minimum Thickness | | Width | | | |
|-------------------|--------|-------------------|--------|------------|------------|------------|-----------|
| Under | Thru | Under | Thru | 38" – <42" | 42" – <48" | 48" – <72" | 72" – 76" |
| 0.0470 | 0.0295 | 0.0455 | 0.0280 | \$3.00 | \$1.50 | Base | Inquire |
| 0.0295 | 0.0235 | 0.0280 | 0.0220 | \$4.50 | \$3.00 | \$1.50 | Inquire |
| 0.0235 | 0.0205 | 0.0220 | 0.0190 | \$7.00 | \$5.50 | \$4.00 | Inquire |
| 0.0205 | 0.0180 | 0.0190 | 0.0170 | \$8.50 | \$7.00 | \$5.50 | Inquire |
| 0.0180 | 0.0160 | 0.0170 | 0.0150 | \$10.00 | \$8.50 | \$7.00 | Inquire |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$11.00 | \$9.50 | \$8.00 | Inquire |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.50 | \$10.00 | \$8.50 | Inquire |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.00 | \$10.50 | \$9.00 | Inquire |
| 0.0130 | 0.0110 | 0.0120 | 0.0100 | Inquire | Inquire | Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A792 | |
|--|--------|
| Hot-dipped 55% aluminum-zinc alloy-coated carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Forming Steel Type A | \$0.50 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 80 – Class 1 | \$0.50 |

STANDARD PROCESSING EXTRAS

| SURFACE FINISH | |
|---------------------------------------|--------|
| Regular Spangle | Base |
| Extra Smooth | \$0.50 |
| SURFACE TREATMENT | |
| Rust-Preventative Oil | Base |
| Standard Passivation (RoHS-Compliant) | Base |
| Standard Passivation | Base |
| Clear Acrylic | \$1.50 |
| RoHS-Compliant Acrylic | \$2.00 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS


GENERAL EXTRAS

| MAXIMUM COIL WEIGHT | |
|------------------------------|---------|
| 20,000# to 50,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| Less than 15,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |


Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

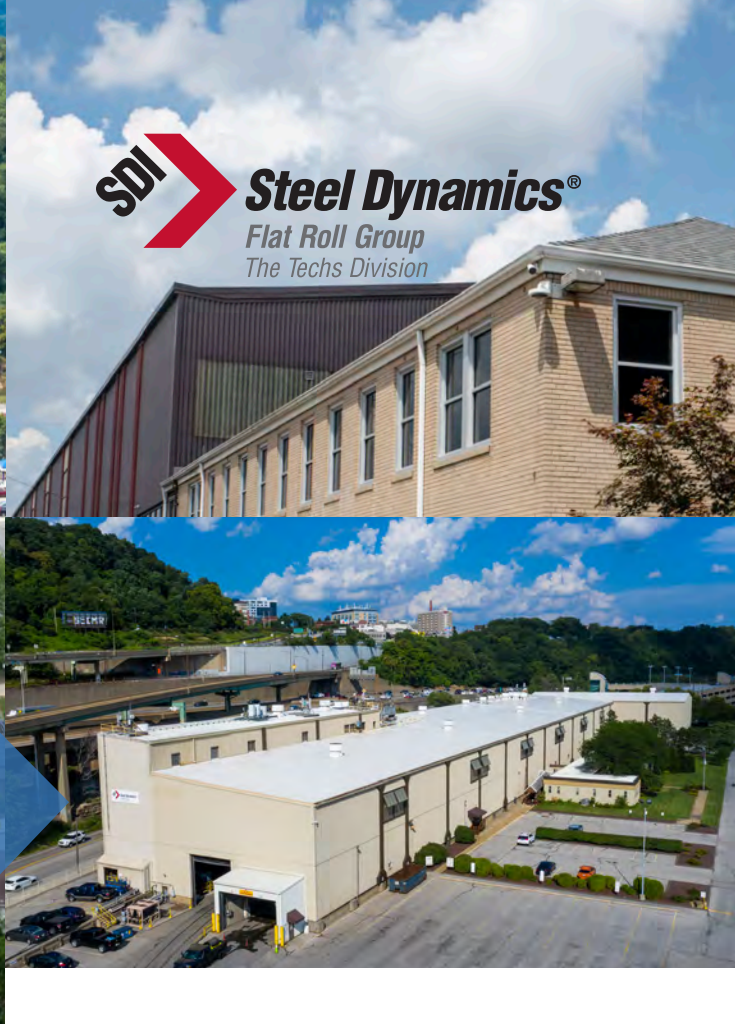

SDI **Steel Dynamics®**
 Flat Roll Group
 The Techs Division

THE TECHS DIVISION

MetalTech | GalvTech | NexTech
 Pittsburgh, Pennsylvania

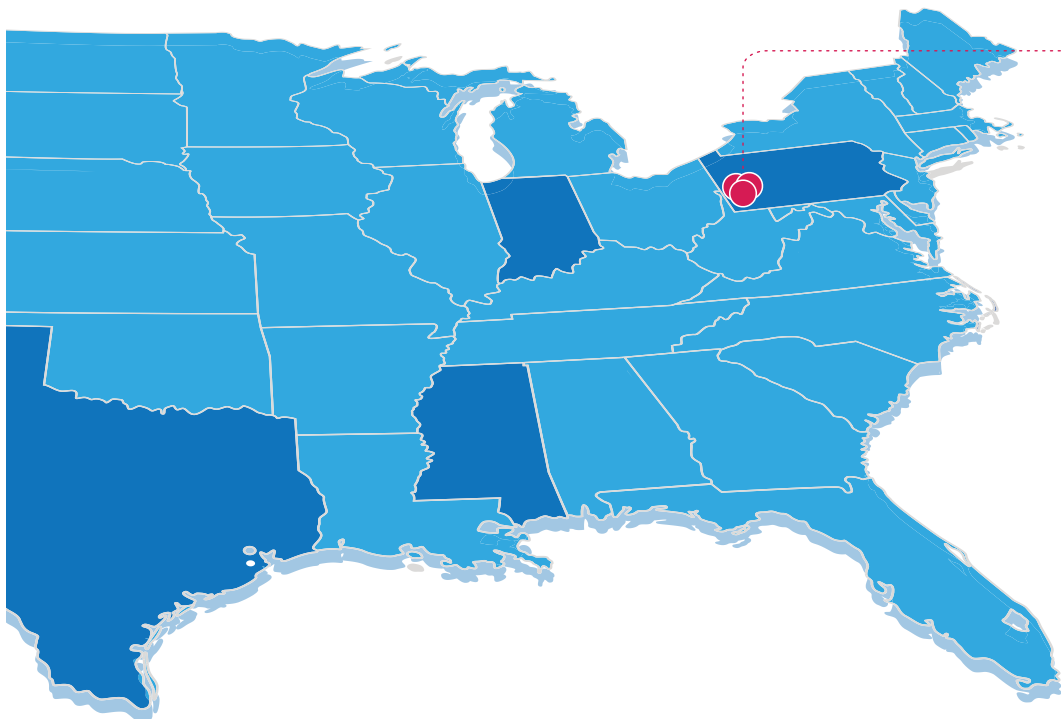

The Techs Division
 MetalTech | GalvTech | NexTech
 Pittsburgh, Pennsylvania

MetalTech
 2400 Second Avenue
 Pittsburgh, PA 15219
 (877) 664-4258

GalvTech
 300 Mifflin Road
 Pittsburgh, PA 15207
 (877) 664-4258

NexTech
 300 Braddock Avenue
 Turtle Creek, PA 15145
 (877) 664-4258

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped galvanized product is suitable for a broad range of applications. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is produced with a regular or minimum spangle and is provided on either a 20" or 24" ID. Our products are produced to a specified minimum thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Minimum Thickness | | Width | | | |
|-------------------|--------|------------|------------|------------|-------------|
| Under | Thru | 24" – <36" | 36" – <42" | 42" – <48" | 48" – 61.5" |
| 0.0460 | 0.0280 | \$4.50 | \$3.00 | \$1.50 | Base |
| 0.0280 | 0.0220 | \$6.00 | \$4.50 | \$3.00 | \$1.50 |
| 0.0220 | 0.0190 | \$8.50 | \$7.00 | \$5.50 | \$4.00 |
| 0.0190 | 0.0170 | \$10.00 | \$8.50 | \$7.00 | \$5.50 |
| 0.0170 | 0.0150 | \$11.50 | \$10.00 | \$8.50 | \$7.00 |
| 0.0150 | 0.0140 | \$12.50 | \$11.00 | \$9.50 | \$8.00 |
| 0.0140 | 0.0130 | \$13.00 | \$11.50 | \$10.00 | \$8.50 |
| 0.0130 | 0.0120 | \$13.50 | \$12.00 | \$10.50 | \$9.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A653

Hot-dipped galvanized carbon steel sheet

Mild Steels

| | |
|---------------------------|--------|
| Commercial Steel Type B | Base |
| Forming Steel Type B | \$0.50 |
| Deep Drawing Steel Type A | \$2.00 |
| Extra Deep Drawing Steel | \$2.75 |

Structural Steels

| | |
|---|--------|
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 – Modified for racking and purlin | \$1.75 |
| SS Grade 80 – Class 1 | \$0.50 |

High-Strength Low-Alloy Steels

| | |
|--------------------------|--------|
| HSLAS Grade 40 | \$1.50 |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 1 | \$3.25 |
| HSLAS Grade 55 – Class 2 | \$2.75 |
| HSLAS Grade 60 | \$3.75 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|----------------------------|--------|
| HSLAS-F Grade 40 | \$1.75 |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 55 – Class 1 | \$3.50 |
| HSLAS-F Grade 55 – Class 2 | \$3.00 |
| HSLAS-F Grade 60 | \$4.00 |

ASTM A1003

Hot-dipped galvanized carbon steel sheet for cold-forming framing members

| | |
|--------------|--------|
| NS Grade 33 | \$0.25 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.75 |
| NS Grade 57 | \$0.75 |
| ST Grade 33H | \$0.25 |
| ST Grade 37H | \$0.25 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.75 |
| ST Grade 55H | \$1.25 |
| ST Grade 80L | \$0.50 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|-----------------|--------|
| Regular Surface | Base |
| Extra Smooth | \$0.50 |

SURFACE TREATMENT

| | |
|----------------------------|---------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Paintable Pretreatment | \$0.50 |
| Clear Acrylic | Inquire |
| RoHS-Compliant Acrylic | Inquire |

OTHER

| | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 60,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALFAN® COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped Galfan® product offers excellent corrosion protection in many applications through the combination of the sacrificial protection of conventional zinc coatings with the excellent barrier protection of aluminum. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI Galfan® steel sheet is produced with a regular bright surface and is provided on either a 20" or 24" ID. Our products are produced to a specified minimum thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Minimum Thickness | |
|-------------------|--------|
| Under | Thru |
| 0.0460 | 0.0280 |
| 0.0280 | 0.0220 |
| 0.0220 | 0.0190 |
| 0.0190 | 0.0170 |
| 0.0170 | 0.0150 |
| 0.0150 | 0.0140 |
| 0.0140 | 0.0130 |
| 0.0130 | 0.0120 |

| Width | | | |
|------------|------------|------------|-------------|
| 24" – <36" | 36" – <42" | 42" – <48" | 48" – 61.5" |
| \$4.50 | \$3.00 | \$1.50 | Base |
| \$6.00 | \$4.50 | \$3.00 | \$1.50 |
| \$8.50 | \$7.00 | \$5.50 | \$4.00 |
| \$10.00 | \$8.50 | \$7.00 | \$5.50 |
| \$11.50 | \$10.00 | \$8.50 | \$7.00 |
| \$12.50 | \$11.00 | \$9.50 | \$8.00 |
| \$13.00 | \$11.50 | \$10.00 | \$8.50 |
| \$13.50 | \$12.00 | \$10.50 | \$9.00 |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A875

Hot-dipped zinc-5% aluminum alloy-coated carbon steel sheet

Mild Steels

| | |
|---------------------------|--------|
| Commercial Steel Type B | Base |
| Forming Steel Type B | \$0.50 |
| Deep Drawing Steel Type A | \$2.00 |
| Extra Deep Drawing Steel | \$2.75 |

Structural Steels

| | |
|-----------------------|--------|
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 | \$1.75 |
| SS Grade 80 – Class 1 | \$0.50 |

High-Strength Low-Alloy Steels

| | |
|----------------|--------|
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 60 | \$3.75 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|------------------|--------|
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 60 | \$4.00 |

ASTM A1003

Hot-dipped galvanized carbon steel sheet for cold-forming framing members

| | |
|--------------|--------|
| NS Grade 33 | \$0.25 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.75 |
| NS Grade 57 | \$1.75 |
| ST Grade 33H | \$0.25 |
| ST Grade 37H | \$0.25 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.75 |
| ST Grade 55H | \$1.25 |
| ST Grade 80L | \$0.50 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|------------------------|--------|
| Regular Bright Surface | Base |
| Extra Smooth | \$0.50 |

SURFACE TREATMENT

| | |
|----------------------------|---------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Paintable Pretreatment | \$0.50 |
| Clear Acrylic | Inquire |
| RoHS-Compliant Acrylic | Inquire |

OTHER

| | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 60,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

GALVANIZED HOT-ROLLED SHEET

Steel Dynamics base hot-rolled, hot-dipped galvanized product is a cost-effective solution for heavy-gauge, unexposed applications where mild surface defects such as coil breaks are not objectionable. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is produced with a regular or minimum spangle and is provided on a 24" ID. Our products are produced to a specified minimum thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Minimum Thickness | | Width | | | |
|-------------------|--------|------------|------------|------------|-----------|
| Under | Thru | 24" – <36" | 36" – <42" | 42" – <48" | 48" – 52" |
| 0.1600 | 0.0660 | \$4.50 | \$3.00 | \$1.50 | Base |
| 0.0660 | 0.0520 | N/A | \$3.25 | \$1.75 | Base |
| 0.0520 | 0.0430 | N/A | \$3.50 | \$2.00 | Base |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A653

Hot-dipped galvanized carbon steel sheet

Mild Steels

| | |
|-------------------------|--------|
| Commercial Steel Type B | Base |
| Forming Steel Type B | \$0.50 |

Structural Steels

| | |
|---|--------|
| SS Grade 33 | \$0.50 |
| SS Grade 37 | \$0.50 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.00 |
| SS Grade 50 – Class 2 | \$0.75 |
| SS Grade 50 – Class 3 | \$1.00 |
| SS Grade 50 – Class 4 | \$0.75 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 – Modified for racking and purlin | \$1.75 |

High-Strength Low-Alloy Steels

| | |
|--------------------------|--------|
| HSLAS Grade 40 | \$1.50 |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 1 | \$3.25 |
| HSLAS Grade 55 – Class 2 | \$2.75 |
| HSLAS Grade 60 | \$3.75 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|----------------------------|--------|
| HSLAS-F Grade 40 | \$1.75 |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 55 – Class 1 | \$3.50 |
| HSLAS-F Grade 55 – Class 2 | \$3.00 |
| HSLAS-F Grade 60 | \$4.00 |

ASTM A1003

Hot-dipped galvanized carbon steel sheet for cold-forming framing members

| | |
|--------------|--------|
| NS Grade 33 | \$0.50 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.00 |
| NS Grade 57 | \$1.50 |
| ST Grade 33H | \$0.50 |
| ST Grade 37H | \$0.50 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.00 |
| ST Grade 55H | \$1.25 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|-----------------|------|
| Regular Spangle | Base |
|-----------------|------|

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |

OTHER

| | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 45,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped galvanized product is suitable for a broad range of applications. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is produced with a regular or minimum spangle and is provided on either a 20" or 24" ID. Our products are produced to a specified minimum thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

| Minimum Thickness | | Width | | | |
|-------------------|--------|------------|------------|------------|-----------|
| Under | Thru | 24" – <36" | 36" – <42" | 42" – <48" | 48" – 52" |
| 0.1200 | 0.0280 | \$4.50 | \$3.00 | \$1.50 | Base |

Additional sizes may be available on an inquiry-by-inquiry basis.

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A653

Hot-dipped galvanized carbon steel sheet

Mild Steels

| | |
|---------------------------|--------|
| Commercial Steel Type B | Base |
| Forming Steel Type B | \$0.50 |
| Deep Drawing Steel Type A | \$2.00 |
| Extra Deep Drawing Steel | \$2.75 |

Structural Steels

| | |
|-----------------------|--------|
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 55 | \$1.25 |
| SS Grade 80 – Class 1 | \$0.50 |

High-Strength Low-Alloy Steels

| | |
|--------------------------|--------|
| HSLAS Grade 40 | \$1.50 |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 55 – Class 1 | \$3.25 |
| HSLAS Grade 55 – Class 2 | \$2.75 |
| HSLAS Grade 60 | \$3.75 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|----------------------------|--------|
| HSLAS-F Grade 40 | \$1.75 |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 55 – Class 1 | \$3.50 |
| HSLAS-F Grade 55 – Class 2 | \$3.00 |
| HSLAS-F Grade 60 | \$4.00 |

ASTM A1003

Hot-dipped galvanized carbon steel sheet for cold-forming framing members

| | |
|--------------|--------|
| NS Grade 33 | \$0.25 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.75 |
| NS Grade 57 | \$1.75 |
| ST Grade 33H | \$0.25 |
| ST Grade 37H | \$0.25 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.75 |
| ST Grade 55H | \$1.25 |
| ST Grade 80L | \$0.50 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|-----------------|------|
| Regular Spangle | Base |
|-----------------|------|

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |

OTHER

| | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 45,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALFAN® HOT-ROLLED SHEET

Steel Dynamics base hot-rolled, hot-dipped Galfan® product offers excellent corrosion protection in many applications through the combination of the sacrificial protection of conventional zinc coatings with the excellent barrier protection of aluminum. SDI Galfan® steel sheet is a cost-effective solution for heavy-gauge, unexposed applications where mild surface defects such as coil breaks are not objectionable. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI Galfan® steel sheet is produced with a regular bright surface and is provided on a 24" ID. Our products are produced to a specified minimum thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Minimum Thickness | |
|-------------------|--------|
| Under | Thru |
| 0.1600 | 0.0660 |
| 0.0660 | 0.0520 |
| 0.0520 | 0.0430 |

| Width | | | |
|------------|------------|------------|-----------|
| 24" – <36" | 36" – <42" | 42" – <48" | 48" – 52" |
| \$4.50 | \$3.00 | \$1.50 | Base |
| N/A | \$3.25 | \$1.75 | Base |
| N/A | \$3.50 | \$2.00 | Base |

STANDARD CHEMISTRY AND GRADE EXTRAS

ASTM A875

Hot-dipped zinc-5% aluminum alloy-coated carbon steel sheet

Mild Steels

| | |
|-------------------------|--------|
| Commercial Steel Type B | Base |
| Forming Steel Type B | \$0.50 |

Structural Steels

| | |
|-----------------------|--------|
| SS Grade 33 | \$0.50 |
| SS Grade 37 | \$0.50 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.00 |
| SS Grade 50 – Class 2 | \$0.75 |
| SS Grade 50 – Class 3 | \$1.00 |
| SS Grade 55 | \$1.25 |
| SS Grade 57 | \$1.75 |

High-Strength Low-Alloy Steels

| | |
|----------------|--------|
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 60 | \$3.75 |

High-Strength Low-Alloy Steels with Improved Formability

| | |
|------------------|--------|
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 60 | \$4.00 |

ASTM A1003

Hot-dipped galvanized carbon steel sheet for cold-forming framing members

| | |
|--------------|--------|
| NS Grade 33 | \$0.50 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.00 |
| NS Grade 57 | \$1.50 |
| ST Grade 33H | \$0.50 |
| ST Grade 37H | \$0.50 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.00 |
| ST Grade 55H | \$1.25 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

STANDARD PROCESSING EXTRAS

SURFACE FINISH

| | |
|------------------------|------|
| Regular Bright Surface | Base |
|------------------------|------|

SURFACE TREATMENT

| | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |

OTHER

| | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

GENERAL EXTRAS

MAXIMUM COIL WEIGHT

| | |
|------------------------------|---------|
| 20,000# to 45,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

MINIMUM LINE ITEM QUANTITY

| | |
|-------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALFAN® COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, hot-dipped Galfan® product offers excellent corrosion protection in many applications through the combination of the sacrificial protection of conventional zinc coatings with the excellent barrier protection of aluminum. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI Galfan® steel sheet is produced with a regular bright surface and is provided on either a 20" or 24" ID. Our products are produced to a specified minimum thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

| Minimum Thickness | | Width | | | |
|-------------------|--------|------------|------------|------------|-----------|
| Under | Thru | 24" – <36" | 36" – <42" | 42" – <48" | 48" – 52" |
| 0.1200 | 0.0280 | \$4.50 | \$3.00 | \$1.50 | Base |

Additional sizes may be available on an inquiry-by-inquiry basis.

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A875 | |
|---|--------|
| Hot-dipped zinc-5% aluminum alloy-coated carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Forming Steel Type B | \$0.50 |
| Deep Drawing Steel Type A | \$2.00 |
| Extra Deep Drawing Steel | \$2.75 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 3 | \$1.75 |
| SS Grade 55 | \$1.25 |
| SS Grade 80 – Class 1 | \$0.50 |
| High-Strength Low-Alloy Steels | |
| HSLAS Grade 50 | \$2.25 |
| HSLAS Grade 60 | \$3.75 |
| High-Strength Low-Alloy Steels with Improved Formability | |
| HSLAS-F Grade 50 | \$2.50 |
| HSLAS-F Grade 60 | \$4.00 |

| ASTM A1003 | |
|---|--------|
| Hot-dipped galvanized carbon steel sheet for cold-forming framing members | |
| NS Grade 33 | \$0.25 |
| NS Grade 40 | \$0.50 |
| NS Grade 50 | \$1.75 |
| NS Grade 57 | \$1.75 |
| ST Grade 33H | \$0.25 |
| ST Grade 37H | \$0.25 |
| ST Grade 40H | \$0.50 |
| ST Grade 50H | \$1.75 |
| ST Grade 55H | \$1.25 |
| ST Grade 80L | \$0.50 |

ADDITIONAL JIS, DIN, AND MANUFACTURER-SPECIFIC STANDARDS AVAILABLE ON AN INQUIRY-BY-INQUIRY BASIS.

STANDARD PROCESSING EXTRAS

| SURFACE FINISH | |
|------------------------|------|
| Regular Bright Surface | Base |

| SURFACE TREATMENT | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |

GENERAL EXTRAS

| MAXIMUM COIL WEIGHT | |
|------------------------------|---------|
| 20,000# to 45,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

| OTHER | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

| MINIMUM LINE ITEM QUANTITY | |
|----------------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

GALVANIZED COLD-ROLLED SHEET

Steel Dynamics base cold-rolled, ultra-light gauge, hot-dipped galvanized product is suitable for a broad range of applications. While generally well-suited to surface-critical applications, this product may be specified as extra smooth in order to minimize the presence of cosmetic defects. A variety of surface treatments is available to further inhibit oxidation or to improve formability. SDI galvanized steel sheet is produced with a regular or minimum spangle and is provided on a 20" ID. Our products are produced to a specified minimum thickness and are sold on an actual scale-weight basis.

STANDARD THICKNESS AND WIDTH EXTRAS

Please note that certain grade, thickness, and width combinations may not be available. Please refer to our product capabilities for more information.

Additional sizes may be available on an inquiry-by-inquiry basis.

| Minimum Thickness | | Width | | |
|-------------------|--------|------------|------------|-------------|
| Under | Thru | 28" – <36" | 36" – <42" | 42" – 43.5" |
| 0.0220 | 0.0190 | \$8.50 | \$7.00 | \$5.50 |
| 0.0190 | 0.0170 | \$10.00 | \$8.50 | \$7.00 |
| 0.0170 | 0.0150 | \$11.50 | \$10.00 | \$8.50 |
| 0.0150 | 0.0140 | \$12.50 | \$11.00 | \$9.50 |
| 0.0140 | 0.0130 | \$13.00 | \$11.50 | \$10.00 |
| 0.0130 | 0.0120 | \$13.50 | \$12.00 | \$10.50 |
| 0.0120 | 0.0070 | Inquire | Inquire | Inquire |

STANDARD CHEMISTRY AND GRADE EXTRAS

| ASTM A653 | |
|--|--------|
| Hot-dipped galvanized carbon steel sheet | |
| Mild Steels | |
| Commercial Steel Type B | Base |
| Forming Steel Type B | \$0.50 |
| Deep Drawing Steel Type A | \$2.00 |
| Structural Steels | |
| SS Grade 33 | \$0.25 |
| SS Grade 37 | \$0.25 |
| SS Grade 40 | \$0.50 |
| SS Grade 50 – Class 1 | \$1.75 |
| SS Grade 50 – Class 2 | \$1.00 |
| SS Grade 50 – Class 4 | \$1.00 |
| SS Grade 80 – Class 1 | \$0.50 |

GENERAL EXTRAS

| MAXIMUM COIL WEIGHT | |
|------------------------------|---------|
| 20,000# to 43,000# | Base |
| 15,000# to less than 20,000# | \$1.00 |
| 10,000# to less than 15,000# | \$1.50 |
| Less than 10,000# | Inquire |

STANDARD PROCESSING EXTRAS

| SURFACE FINISH | |
|-----------------|--------|
| Regular Spangle | Base |
| Extra Smooth | \$0.50 |

| SURFACE TREATMENT | |
|----------------------------|--------|
| Rust-Preventative Oil | Base |
| Standard Passivation | Base |
| RoHS-Compliant Passivation | \$0.50 |
| Paintable Pretreatment | \$0.50 |
| Clear Acrylic | \$1.50 |
| RoHS-Compliant Acrylic | \$2.00 |
| Tinted Acrylic | \$2.50 |


| OTHER | |
|--------------------|--------|
| Test Reports | \$0.25 |
| U.L. Certification | \$0.25 |

PLEASE REFERENCE THE ATTACHED METALLIC COATING EXTRAS

| MINIMUM LINE ITEM QUANTITY | |
|----------------------------|--------|
| 40 tons or more | Base |
| Less than 40 tons | \$1.00 |

Line item is defined as same grade, thickness, and width, with one delivery date for the entire line item.

All offers expire after 24 hours, unless otherwise noted, and are subject to availability. All material is expected to ship within five business days from notification of availability. All truck pre-paid shipments will be invoiced at 40,000-pound minimum quantities. All prices are per hundred-weight and are based on actual scale-weight billing. Our products are sold FOB seller's place of business, or a seller-designated storage or outside processing facility.

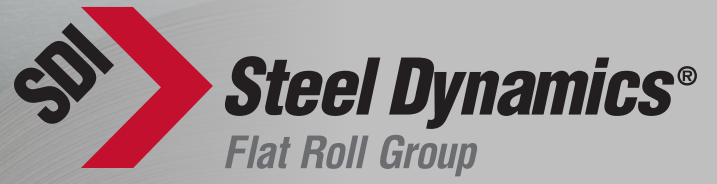

METALLIC COATING EXTRAS

METALLIC COATING EXTRAS

Effective July 3, 2023

STANDARD METALLIC COATING EXTRAS

| Nominal | | Minimum | | G30(U) Z90 | A40/G40(U) ZF120/Z120 | A60/G60(U) ZF180/Z180 | G90(U) Z275 | G100 Z305 | G115 Z350 | G140 Z450 | G165 Z500 | G185 Z550 | G210 Z600 | G235 Z700 |
|---------|--------|---------|--------|---------------|--------------------------|--------------------------|----------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|
| Under | Thru | Under | Thru | | | | | | | | | | | |
| 0.1630 | 0.1330 | 0.1600 | 0.1300 | \$1.10 | \$1.15 | \$1.60 | \$2.25 | \$2.75 | \$2.95 | \$3.70 | \$4.35 | \$5.00 | \$5.15 | \$6.45 |
| 0.1330 | 0.1030 | 0.1300 | 0.1000 | \$1.60 | \$1.80 | \$2.30 | \$3.05 | \$3.45 | \$3.75 | \$4.65 | \$5.65 | \$6.50 | \$6.75 | \$8.20 |
| 0.1030 | 0.0870 | 0.1000 | 0.0840 | \$1.85 | \$1.90 | \$2.35 | \$3.60 | \$3.85 | \$4.25 | \$5.15 | \$6.05 | \$7.20 | \$7.45 | \$8.90 |
| 0.0870 | 0.0730 | 0.0840 | 0.0700 | \$1.90 | \$2.00 | \$3.20 | \$4.60 | \$4.75 | \$4.95 | \$6.25 | \$7.95 | \$8.55 | \$9.95 | \$10.70 |
| 0.0730 | 0.0560 | 0.0700 | 0.0540 | \$2.40 | \$2.60 | \$4.10 | \$5.75 | \$6.15 | \$6.45 | \$8.00 | \$10.40 | \$11.00 | \$12.40 | \$13.75 |
| 0.0560 | 0.0460 | 0.0540 | 0.0440 | \$2.95 | \$3.05 | \$4.20 | \$6.10 | \$6.75 | \$8.10 | \$9.80 | \$11.10 | \$13.30 | \$14.10 | \$16.90 |
| 0.0460 | 0.0380 | 0.0440 | 0.0360 | \$3.35 | \$3.40 | \$4.95 | \$7.25 | \$8.20 | \$9.50 | \$11.95 | \$13.15 | \$15.80 | \$16.70 | \$20.40 |
| 0.0380 | 0.0340 | 0.0360 | 0.0320 | \$3.70 | \$3.85 | \$5.65 | \$8.20 | \$9.05 | \$10.60 | \$13.15 | \$14.55 | \$17.95 | \$18.70 | \$22.90 |
| 0.0340 | 0.0300 | 0.0320 | 0.0280 | \$3.95 | \$4.20 | \$5.70 | \$8.35 | \$9.40 | \$11.95 | \$14.60 | \$16.85 | \$20.20 | \$21.40 | \$25.70 |
| 0.0300 | 0.0265 | 0.0280 | 0.0250 | \$4.35 | \$4.60 | \$6.50 | \$9.65 | \$10.60 | \$13.30 | | | | | |
| 0.0265 | 0.0235 | 0.0250 | 0.0220 | \$4.75 | \$4.95 | \$7.25 | \$10.70 | \$11.75 | \$15.30 | | | | | |
| 0.0235 | 0.0215 | 0.0220 | 0.0200 | \$5.75 | \$6.10 | \$8.35 | \$12.65 | \$14.20 | \$16.15 | | | | | |
| 0.0215 | 0.0195 | 0.0200 | 0.0180 | \$6.10 | \$6.45 | \$9.30 | \$14.00 | \$15.35 | \$17.60 | | | | | |
| 0.0195 | 0.0170 | 0.0180 | 0.0160 | \$6.55 | \$6.85 | \$10.35 | \$14.95 | \$17.15 | | | | | | |
| 0.0170 | 0.0160 | 0.0160 | 0.0150 | \$7.00 | \$7.45 | \$10.60 | \$15.80 | \$18.65 | | | | | | |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$8.35 | \$8.80 | \$12.65 | \$18.35 | \$20.95 | | | | | | |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$8.80 | \$9.25 | \$13.00 | \$19.90 | | | | | | | |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$9.50 | \$10.05 | \$13.90 | \$21.05 | | | | | | | |

Please refer to our product capabilities for detailed information regarding the purchase of coating weights greater than G-100.

ASTM A653 Table 1 – Total coating mass both sides in oz/ft² and grams/m²

METRIC METALLIC COATING EXTRAS

| Nominal | | Minimum | | 40A/40A 40G/40G | 45A/45A 45G/45G | 50A/50A 50G/50G | 60G/60G | 70G/70G | 90G/90G | 98G/98G |
|---------|--------|---------|--------|--------------------|--------------------|--------------------|---------|---------|---------|---------|
| Under | Thru | Under | Thru | | | | | | | |
| 0.1630 | 0.1330 | 0.1600 | 0.1300 | \$1.40 | \$1.40 | \$1.40 | \$1.40 | \$1.85 | \$2.00 | \$2.25 |
| 0.1330 | 0.1030 | 0.1300 | 0.1000 | \$1.85 | \$1.85 | \$1.85 | \$1.85 | \$2.30 | \$2.60 | \$2.85 |
| 0.1030 | 0.0870 | 0.1000 | 0.0840 | \$2.00 | \$2.00 | \$2.00 | \$2.00 | \$2.40 | \$3.00 | \$3.15 |
| 0.0870 | 0.0730 | 0.0840 | 0.0700 | \$2.35 | \$2.35 | \$2.35 | \$2.35 | \$3.05 | \$3.85 | \$3.90 |
| 0.0730 | 0.0560 | 0.0700 | 0.0540 | \$3.15 | \$3.15 | \$3.15 | \$3.15 | \$3.85 | \$4.30 | \$4.65 |
| 0.0560 | 0.0460 | 0.0540 | 0.0440 | \$3.85 | \$3.85 | \$3.85 | \$3.85 | \$4.30 | \$5.00 | \$5.20 |
| 0.0460 | 0.0380 | 0.0440 | 0.0360 | \$4.65 | \$4.65 | \$4.65 | \$4.65 | \$5.15 | \$6.15 | \$6.30 |
| 0.0380 | 0.0340 | 0.0360 | 0.0320 | \$5.00 | \$5.00 | \$5.00 | \$5.00 | \$5.50 | \$6.80 | \$7.20 |
| 0.0340 | 0.0300 | 0.0320 | 0.0280 | \$5.45 | \$5.45 | \$5.45 | \$5.45 | \$6.20 | \$7.50 | \$7.90 |
| 0.0300 | 0.0265 | 0.0280 | 0.0250 | \$6.15 | \$6.15 | \$6.15 | \$6.15 | \$7.45 | \$8.50 | \$8.85 |
| 0.0265 | 0.0235 | 0.0250 | 0.0220 | \$6.95 | \$6.95 | \$6.95 | \$6.95 | \$8.10 | \$9.75 | \$10.15 |
| 0.0235 | 0.0215 | 0.0220 | 0.0200 | \$7.50 | \$7.50 | \$7.50 | \$7.50 | \$8.75 | \$10.60 | \$11.00 |
| 0.0215 | 0.0195 | 0.0200 | 0.0180 | \$8.25 | \$8.25 | \$8.25 | \$8.25 | \$9.75 | \$11.40 | \$12.00 |
| 0.0195 | 0.0170 | 0.0180 | 0.0160 | \$9.50 | \$9.50 | \$9.50 | \$9.50 | \$10.60 | \$13.20 | \$13.75 |
| 0.0170 | 0.0160 | 0.0160 | 0.0150 | \$10.15 | \$10.15 | \$10.15 | \$10.15 | \$11.35 | \$14.50 | \$15.25 |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | \$10.90 | \$10.90 | \$10.90 | \$10.90 | \$12.10 | \$15.60 | \$16.10 |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | \$11.40 | \$11.40 | \$11.40 | \$11.40 | \$13.30 | \$16.45 | \$17.35 |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | \$12.45 | \$12.45 | \$12.45 | \$12.45 | \$14.05 | \$17.60 | \$18.50 |

ASTM A653 Table S2.1 – Minimum coating mass per side in grams/m²

GALVALUME® COATING EXTRAS

| AZ35 | AZ50 | AZ55 | AZ60 |
|---------|-------|-------|-------|
| Inquire | 5.70 | 6.30 | 6.75 |
| 5.20 | 6.05 | 6.65 | 7.25 |
| 5.40 | 6.35 | 6.90 | 7.60 |
| 6.15 | 7.15 | 7.85 | 8.65 |
| 6.90 | 8.10 | 8.90 | 9.70 |
| 7.80 | 9.15 | 10.05 | 10.95 |
| 8.75 | 10.20 | 11.20 | 12.25 |
| 9.60 | 11.25 | 12.40 | 13.55 |
| 10.70 | 12.60 | 13.85 | 15.15 |
| 11.75 | 13.85 | 15.20 | 16.60 |
| 12.95 | 15.25 | 16.85 | 18.35 |
| 14.45 | 16.90 | 18.60 | 20.30 |
| 16.30 | 19.15 | 21.15 | 23.05 |

Coating weights less than AZ50 are marketed as ASTM A 792 55% Aluminum-Zinc Alloy-Coated Sheet rather than GALVALUME®.

METALLIC COATING EXTRAS

Effective July 3, 2023

GALFAN® METALLIC COATING EXTRAS

| Minimum | | GF15 ZA45 | GF20 ZA60 | GF30 ZA90 | GF45 ZA135 | GF60 ZA180 | GF75 ZA225 | GF90 ZA270 | GF115 ZA345 |
|---------|--------|--------------|--------------|--------------|---------------|---------------|---------------|---------------|----------------|
| Under | Thru | | | | | | | | |
| 0.1600 | 0.1300 | | | \$1.50 | \$2.05 | \$2.60 | \$3.00 | \$3.10 | \$4.60 |
| 0.1300 | 0.1000 | | | \$1.80 | \$2.35 | \$3.10 | \$3.40 | \$3.70 | \$5.20 |
| 0.1000 | 0.0840 | | | \$1.90 | \$2.80 | \$3.40 | \$3.95 | \$4.45 | \$5.90 |
| 0.0840 | 0.0700 | | | \$2.60 | \$3.40 | \$4.25 | \$4.90 | \$5.20 | \$6.80 |
| 0.0700 | 0.0540 | \$1.55 | \$1.80 | \$2.95 | \$3.95 | \$5.40 | \$5.90 | \$6.40 | \$9.40 |
| 0.0540 | 0.0440 | \$1.60 | \$2.30 | \$3.35 | \$4.60 | \$6.10 | \$6.55 | \$7.00 | \$11.70 |
| 0.0440 | 0.0360 | \$1.90 | \$2.60 | \$3.85 | \$5.35 | \$7.25 | \$7.90 | \$8.55 | \$13.75 |
| 0.0360 | 0.0320 | \$2.25 | \$3.10 | \$4.35 | \$6.10 | \$8.20 | \$8.80 | \$9.40 | \$15.10 |
| 0.0320 | 0.0280 | \$2.40 | \$3.35 | \$4.65 | \$6.55 | \$8.55 | \$9.30 | \$10.05 | \$16.90 |
| 0.0280 | 0.0250 | \$2.65 | \$3.40 | \$4.95 | \$7.00 | \$9.50 | \$10.15 | \$10.80 | \$18.75 |
| 0.0250 | 0.0220 | \$2.95 | \$3.60 | \$5.70 | \$8.30 | \$10.60 | \$11.50 | \$12.30 | \$21.45 |
| 0.0220 | 0.0200 | \$3.40 | \$4.50 | \$6.55 | \$9.70 | \$12.25 | \$13.30 | \$14.50 | |
| 0.0200 | 0.0180 | \$4.85 | \$5.20 | \$7.60 | \$10.60 | \$13.45 | \$14.65 | \$15.80 | |
| 0.0180 | 0.0160 | \$5.65 | \$5.75 | \$8.55 | \$11.35 | \$15.10 | \$16.50 | \$17.85 | |
| 0.0160 | 0.0150 | \$6.10 | \$6.40 | \$9.50 | \$12.40 | \$15.60 | \$17.15 | \$18.65 | |
| 0.0150 | 0.0140 | \$6.85 | \$7.25 | \$10.80 | \$14.20 | \$18.65 | \$20.20 | \$21.80 | |
| 0.0140 | 0.0130 | \$7.45 | \$7.60 | \$11.55 | \$15.10 | \$19.45 | \$21.45 | \$23.65 | |
| 0.0130 | 0.0120 | \$8.00 | \$8.30 | \$12.30 | \$16.15 | \$20.70 | \$22.90 | \$25.15 | |
| 0.0120 | 0.0110 | Inquire | Inquire | Inquire | Inquire | | | | |
| 0.0110 | 0.0100 | Inquire | Inquire | Inquire | Inquire | | | | |

ALUMINIZED COATING EXTRAS - TYPE 1 & 2

| Nominal | | Minimum | | Coating Weight | | | | | | |
|---------|--------|---------|--------|----------------|-------------|-------------|-------------|-------------|-------------|--------------|
| Under | Thru | Under | Thru | Type 1 13 | Type 1 25 | Type 1 40 | Type 1 50 | Type 1 60 | Type 2 65 | Type 2 100 |
| 0.1630 | 0.1340 | 0.1600 | 0.1300 | Inquire | Inquire | Inquire | Inquire | Inquire | \$1.05 | \$2.05 |
| 0.1340 | 0.1200 | 0.1300 | 0.1160 | Inquire | Inquire | Inquire | Inquire | Inquire | \$1.65 | \$2.55 |
| 0.1200 | 0.1050 | 0.1160 | 0.1010 | Inquire | Inquire | Inquire | Inquire | Inquire | \$1.90 | \$3.25 |
| 0.1050 | 0.0870 | 0.1010 | 0.0850 | \$1.15 | \$1.60 | \$2.05 | \$2.30 | \$2.50 | \$2.20 | \$3.90 |
| 0.0870 | 0.0770 | 0.0850 | 0.0750 | \$1.45 | \$2.05 | \$2.70 | \$3.05 | \$3.40 | \$2.80 | \$4.80 |
| 0.0770 | 0.0620 | 0.0750 | 0.0600 | \$1.50 | \$2.10 | \$2.80 | \$3.15 | \$3.45 | \$3.30 | \$5.05 |
| 0.0620 | 0.0540 | 0.0600 | 0.0520 | \$1.60 | \$2.20 | \$2.95 | \$3.35 | \$3.70 | \$4.20 | \$6.30 |
| 0.0540 | 0.0460 | 0.0520 | 0.0440 | \$1.90 | \$2.65 | \$3.60 | \$4.10 | \$4.60 | \$4.65 | \$8.40 |
| 0.0460 | 0.0370 | 0.0440 | 0.0360 | \$2.40 | \$3.30 | \$4.50 | \$5.10 | \$5.70 | Inquire | Inquire |
| 0.0370 | 0.0330 | 0.0360 | 0.0320 | \$2.70 | \$3.75 | \$5.10 | \$5.80 | \$6.45 | | |
| 0.0330 | 0.0290 | 0.0320 | 0.0280 | \$3.10 | \$4.30 | \$5.85 | \$6.70 | \$7.45 | | |
| 0.0290 | 0.0260 | 0.0280 | 0.0250 | \$3.55 | \$4.95 | \$6.55 | \$7.45 | \$8.20 | | |
| 0.0260 | 0.0230 | 0.0250 | 0.0220 | \$4.00 | \$5.55 | \$7.45 | Inquire | Inquire | | |
| 0.0230 | 0.0210 | 0.0220 | 0.0200 | \$4.45 | \$6.20 | \$8.35 | Inquire | Inquire | | |
| 0.0210 | 0.0200 | 0.0200 | 0.0190 | \$4.95 | \$6.75 | \$9.20 | Inquire | Inquire | | |
| 0.0200 | 0.0190 | 0.0190 | 0.0180 | \$5.15 | \$6.85 | \$9.30 | Inquire | Inquire | | |
| 0.0190 | 0.0180 | 0.0180 | 0.0170 | \$5.50 | \$7.60 | \$10.50 | Inquire | Inquire | | |
| 0.0180 | 0.0170 | 0.0170 | 0.0160 | \$5.85 | \$8.20 | \$11.05 | | | | |
| 0.0170 | 0.0160 | 0.0160 | 0.0150 | \$6.25 | \$8.70 | \$11.85 | | | | |
| 0.0160 | 0.0150 | 0.0150 | 0.0140 | Inquire | Inquire | Inquire | | | | |
| 0.0150 | 0.0140 | 0.0140 | 0.0130 | Inquire | Inquire | Inquire | | | | |
| 0.0140 | 0.0130 | 0.0130 | 0.0120 | Inquire | Inquire | Inquire | | | | |



www.steeldynamics.com